

Contents

| | |
|--------------------------------------|---|
| Features | 1 |
| Block Diagram | 1 |
| Pin Arrangement | 1 |
| Dimensions | 2 |
| Absolute Maximum Ratings | 2 |
| Electrical Characteristics | 2 |
| Definition of Terms | 3 |
| Application Temperature Switch | 4 |
| Characteristics | 5 |

The S-8100BF is a high-precision temperature compensation IC, integrated on a single chip with a linear output voltage of -8.1mV/K . It is composed of a temperature sensor, a constant current circuit, and an operational amplifier. Its temperature range is from -40°C to $+100^\circ\text{C}$. The S-8100BF has much better linearity than other temperature sensors such as thermistors. It can be used for a wide application range of temperature controls.

■ Features

- Linear output voltage : $-8.1\text{mV/K} (-8.1\text{mV}/^\circ\text{C})$
 $T_a = -20^\circ\text{C} : 1.900\text{V}$
 $T_a = +30^\circ\text{C} : 1.497\text{V}$
 $T_a = +80^\circ\text{C} : 1.085\text{V}$
- Linearity : $\pm 1.0\%$ (-20°C to $+80^\circ\text{C}$)
- Repeatability : $\pm 0.3\%$
- V_{SS} standard output
- Built-in operational amplifier
- Current consumption : $10\mu\text{A}$ (25°C) typ.
- Compact 3-pin plastic package

■ Block Diagram

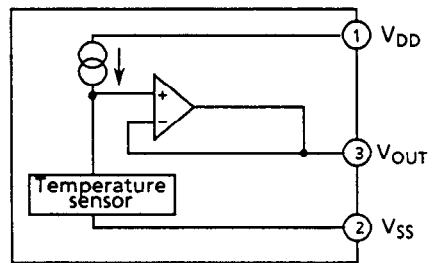


Figure 1

■ Pin Arrangement

SOT-89-3





Figure 2

CMOS TEMPERATURE COMPENSATION IC S-8100BF

■ Dimensions

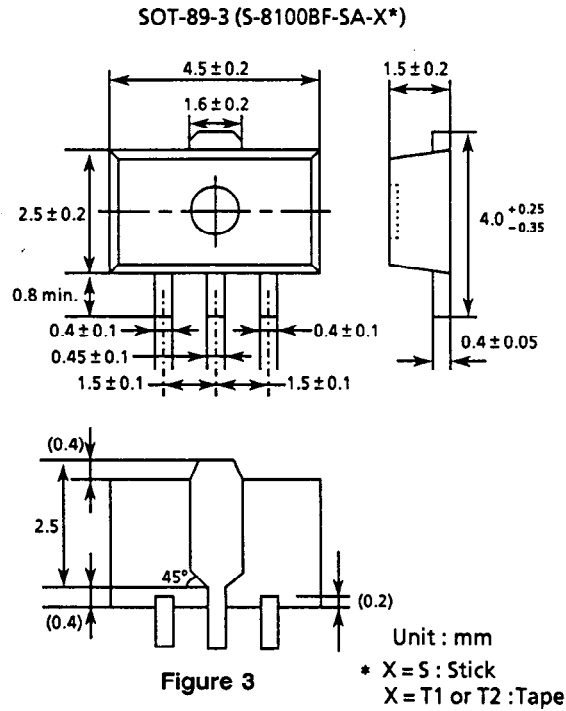

■ Absolute Maximum Ratings

Table 1

| Parameter | Symbol | Ratings | Unit |
|--|----------------------|----------------------|------|
| Power supply voltage ($V_{SS} = 0V$) | V_{DD} | 6 | V |
| Input/output voltage | V_{IN} , V_{OUT} | V_{SS} to V_{DD} | V |
| Operating temperature | T_{opr} | -40 to +100 | °C |
| Storage temperature | T_{stg} | -55 to +125 | °C |

■ Electrical Characteristics

Table 2


($-40^{\circ}C \leq T_a \leq +100^{\circ}C$, $V_{DD} = 5.0V$)

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|-------------------------|------------------|---|-------|-------|-----------|------------|
| Power supply voltage | V_{DD} | | 3.0 | 5.0 | 5.5 | V |
| Temperature sensitivity | V_{SE} | $-20^{\circ}C \leq T_a \leq +80^{\circ}C$ | — | -8.14 | — | mV/°C |
| Output voltage | V_{OUT} | $T_a = -20^{\circ}C$ | 1.852 | 1.900 | 1.964 | V |
| | | $T_a = +30^{\circ}C$ | 1.452 | 1.497 | 1.564 | V |
| | | $T_a = +80^{\circ}C$ | 1.039 | 1.085 | 1.151 | V |
| Linearity | ΔNL | $-20^{\circ}C$ to $+80^{\circ}C$ | — | — | ± 1.0 | % |
| Reproducibility | ΔV_{OUT} | | — | — | ± 0.3 | % |
| Operating temperature | T_{opr} | $\Delta NL \leq \pm 2.0\%$ | -40 | — | 100 | °C |
| Current consumption | I_{DD} | $T_a = +25^{\circ}C$ | — | 10 | 20 | μA |
| Output resistance | R_o | $T_a = +25^{\circ}C$ | — | 50 | — | k Ω |

■ Definition of Terms

1. Deviation of V_{OUT}

Maximum output voltage difference at -20°C , 30°C , and 80°C

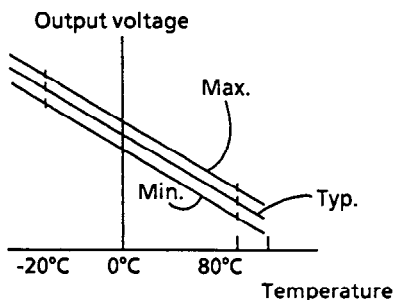


2. Linearity (ΔNL)

$$\Delta NL = \frac{a}{b}$$

a : Maximum output voltage difference between (A) and (B)

b : Output voltage

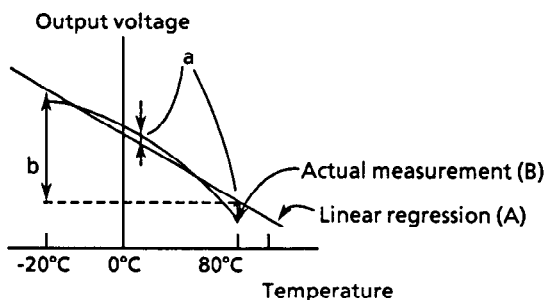


3. Reproducibility (ΔV_{OUT})

$$\Delta V_{OUT} = \frac{c}{b}$$


Maximum output voltage difference between before and after long-term reliability tests (1000H, high temperature and high humidity, etc.)

(Long-term reliability test at high temperature and under high humidity)

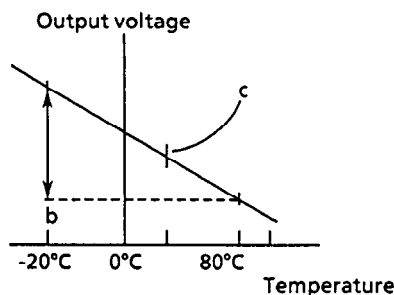

4. Output resistance (R_O)

$$R_O = \frac{\Delta V_O}{\Delta I_O}$$

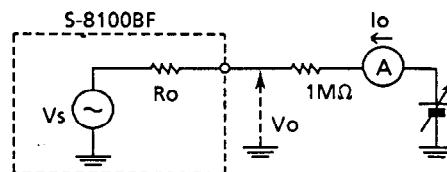

■ **Application Temperature Switch**

- Block Diagram


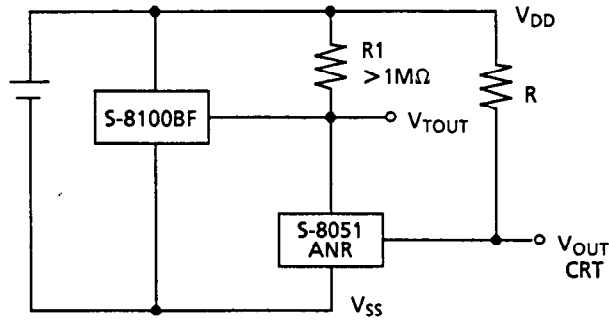


Figure 4

- Any desired temperature can be detected by combining the S-8100BF with a Seiko Instruments voltage detector and operating within the temperature range of the voltage detector.

- Output waveform

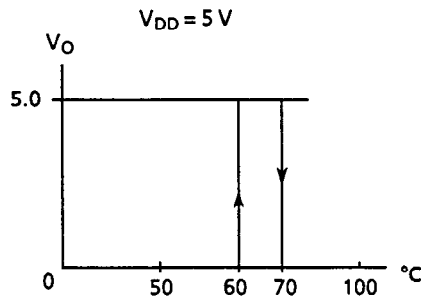

For the S-8051ANR, this becomes the 70°C temperature switch.

Figure 5

Note: Because the output impedance of the S-8100BF's CMOS output buffer is high, the output voltage level may fall because of contact with external circuits. If this happens, apply pull-up resistance, as shown in Figure 6.


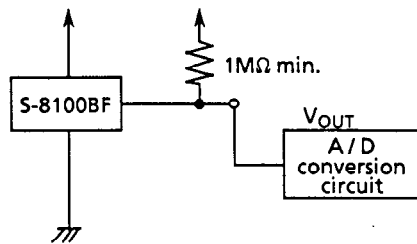



Figure 6

■ Characteristics


1. Ambient temperature (T_a)
- Output voltage (V_{OUT})

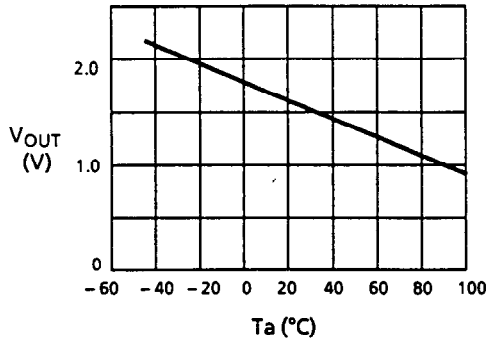


2. Ambient temperature (T_a)
- Current consumption (I_{DD})

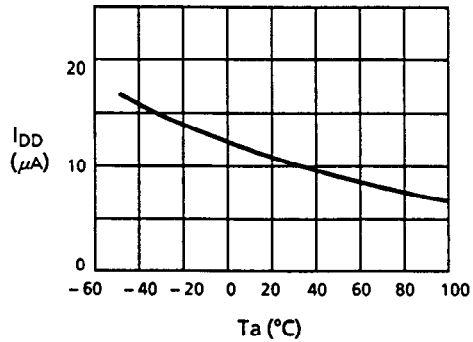


3. Power supply voltage (V_{DD})
- Output voltage (V_{OUT})

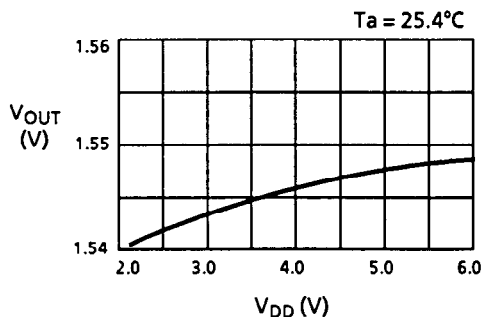

4. Power supply voltage (V_{DD})
- Current consumption (I_{DD})

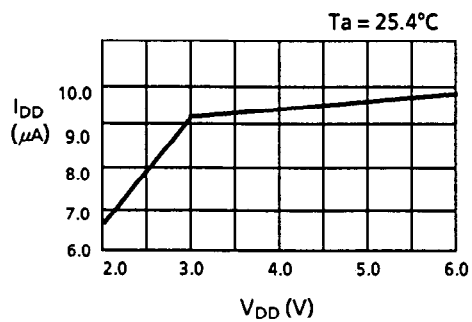

5. Heat response

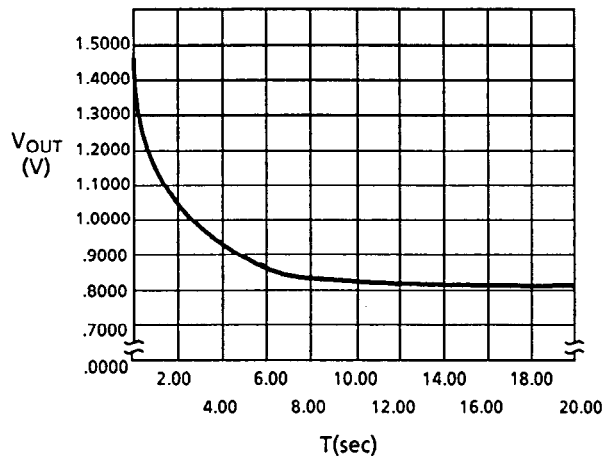

25°C → 100°C

$T_1 = 8$ sec

$T_2 = 2$ sec

T_1 : Time required for output voltage to reach 95% of attainable voltage when a package is put into 100°C of water from 25°C of air.

T_2 : Time required for output voltage to reach 65% of attainable voltage when a package is put into 100°C of water from 25°C of air.