

**SJPB-H6**

Schottky Barrier Rectifier

Mar. 2008

**General Description**

SJPB-H6 is a Schottky Barrier Diode, and has achieved low leakage current and low VF by selecting the best barrier metal.


**Applications**

- DC-DC converters
- AC adapter
- High frequency rectification circuit

**Features**

- Super-high speed & low noise switching.
- Low forward voltage drop.

**Package**

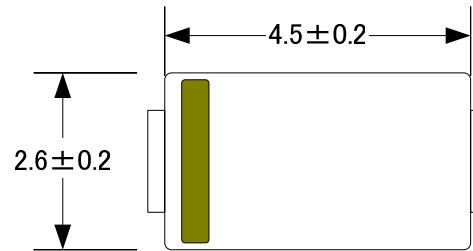


**Key Specifications**


Symbol	Unit	Rating	Conditions
$V_{RM}$	V	60	
$V_F$	V	0.69	$I_F=2.0A$
$I_{F(AV)}$	A	2.0	

**Typical Characteristics**

SJPB-H6 IF-VF Characteristics

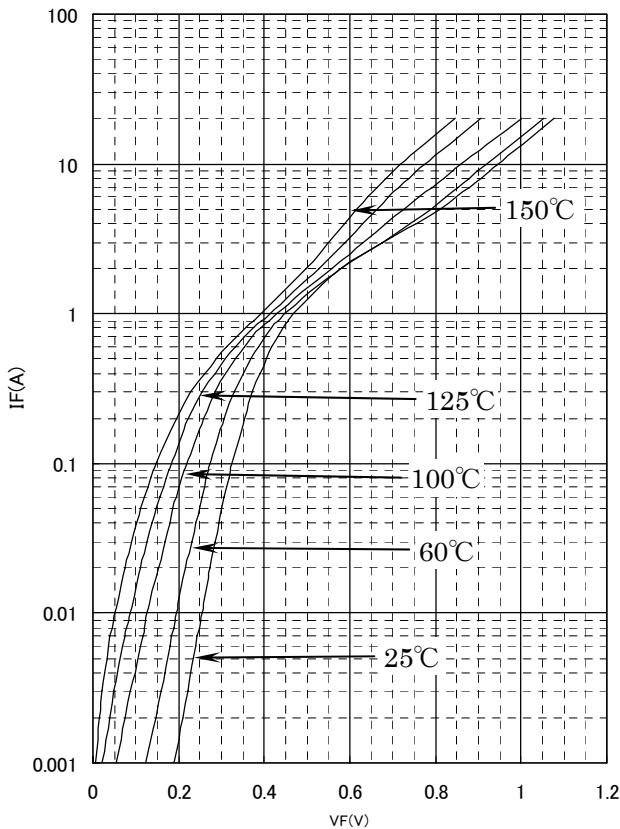

SJPB-H6 VR-IR Characteristics

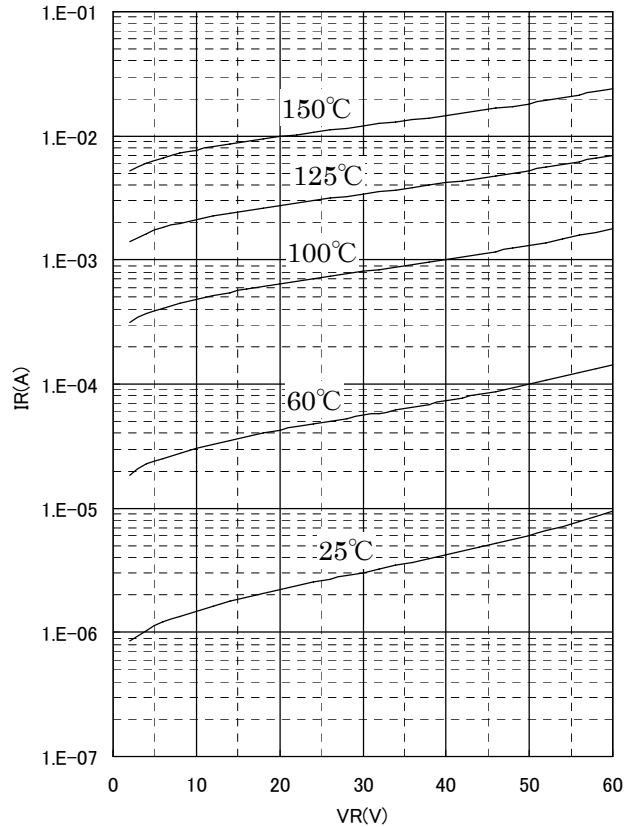

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.

## SJPB-H6

Mar. 2008

Schottky Barrier Rectifier

### \* Absolute maximum ratings

No.	Parameter	Symbol	Unit	Rating	Conditions
1	Transient Peak Reverse Voltage	$V_{RSM}$	V	60	
2	Peak Reverse Voltage	$V_{RM}$	V	60	
3	Average Forward Current	$I_{F(AV)}$	A	2.0	
4	Peak Surge Forward Current	$I_{FSM}$	A	40	Half sinewave, one shot
5	$I^2t$ Limiting Value	$I^2t$	A <sup>2</sup> s	8.0	1msec<t<10msec
6	Junction Temperature	$T_j$	°C	-40 to +150	
7	Storage Temperature	$T_{stg}$	°C	-40 to +150	

### \* Electrical characteristics (Ta=25°C, unless otherwise specified)

No.	Parameter	Symbol	Unit	Rating	Conditions
1	Forward Voltage Drop	$V_F$	V	0.69 max.	$I_F=2.0A$
2	Reverse Leakage Current	$I_R$	uA	200 max.	$V_R=V_{RM}$
3	Reverse Leakage Current Under High Temperature	$H \cdot I_R$	mA	55 max.	$V_R=V_{RM}, T_j=150^\circ C$
4	Thermal Resistance	$R_{th(j-l)}$	°C/W	20 max.	Between Junction and Lead

The information included herein is believed to be accurate and reliable. However, SANKEN ELECTRIC CO., LTD assumes no responsibility for its use ; nor for any infringements of patents or other rights of third parties that may result from its use.


**SJPB-H6**

Schottky Barrier Rectifier


Mar. 2008

★ Characteristics


Forward Power Dissipation

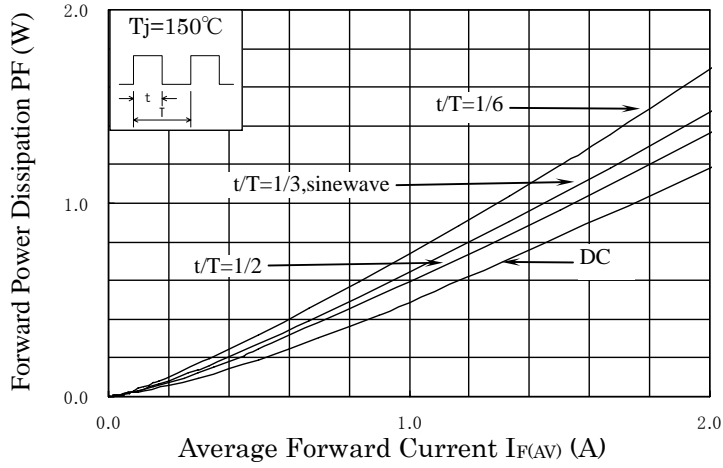

Reverse Power Dissipation

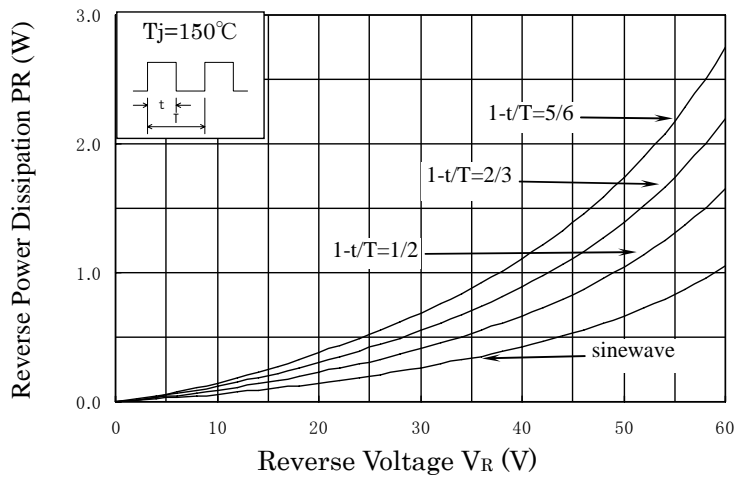


Current Derating  $V_R=60\text{V}$

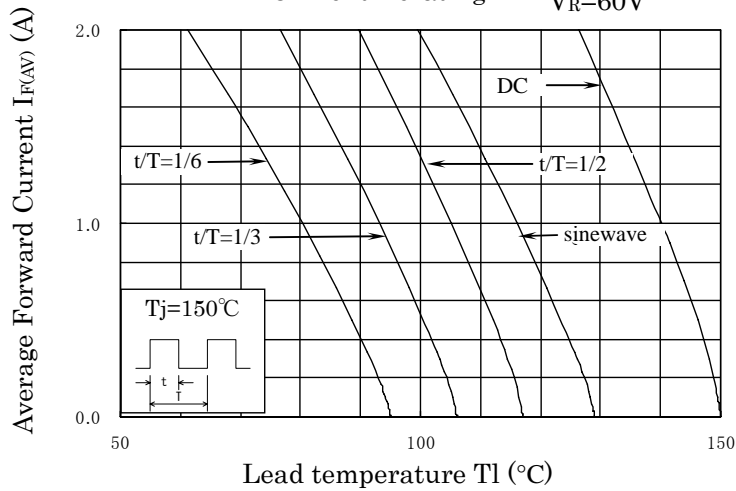

**SJPB-H6**  
Schottky Barrier Rectifier

Mar. 2008

★ Outline drawings, mm

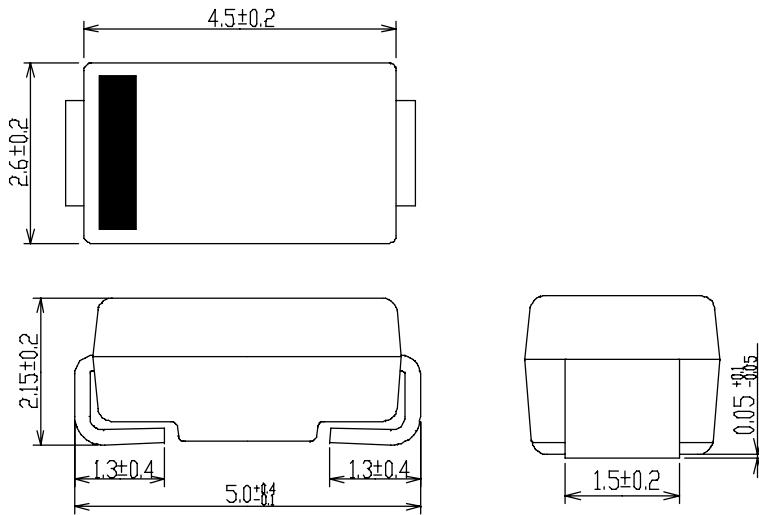

★ Connection Diagram

