

SANYO	No.3011	2SA1682
		PNP Epitaxial Planar Silicon Transistor TV Camera Deflection, High-Voltage Driver Applications

Features

- High breakdown voltage ($V_{CEO} \geq 300V$)
- Small reverse transfer capacitance and excellent high frequency characteristic ($c_{re} : 1.5pF$ typ)
- Excellent DC current gain ratio (h_{FE} ratio : 1.0 typ)
- Adoption of FBET process

Absolute Maximum Ratings at $T_a = 25^\circ C$

			unit
Collector to Base Voltage	V_{CBO}	-300	V
Collector to Emitter Voltage	V_{CEO}	-300	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-50	mA
Collector Current(Pulse)	I_{CP}	-100	mA
Collector Dissipation	P_C	250	mW
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature	T_{stg}	-55 to +150	$^\circ C$

Electrical Characteristics at $T_a = 25^\circ C$


			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = -200V, I_E = 0$			-0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = -4V, I_C = 0$			-0.1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE} = -6V, I_C = -0.1mA$	100*		320*	
	$h_{FE(2)}$	$V_{CE} = -6V, I_C = -1mA$	100			
Gain-Bandwidth Product	f_T	$V_{CE} = -30V, I_C = -10mA$		70		MHz
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = -10mA, I_B = -1mA$			-1.0	V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = -10mA, I_B = -1mA$			-1.0	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -10\mu A, I_E = 0$	-300			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -1mA, R_{BE} = \infty$	-300			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -10\mu A, I_C = \infty$	-5			V
Output Capacitance	c_{ob}	$V_{CB} = -30V, f = 1MHz$		2.4		pF
Reverse Transfer Capacitance	c_{re}	$V_{CB} = -30V, f = 1MHz$		1.5		pF
DC Current Gain Ratio	h_{FE} ratio	$h_{FE(1)}/h_{FE(2)}$		1.0		

* : The 2SA1682 is classified by 0.1mA h_{FE} as follows :









100	4	200	160	5	320
-----	---	-----	-----	---	-----

(Note) Marking : CS
 h_{FE} rank : 4,5

Package Dimensions 2018A
(unit : mm)

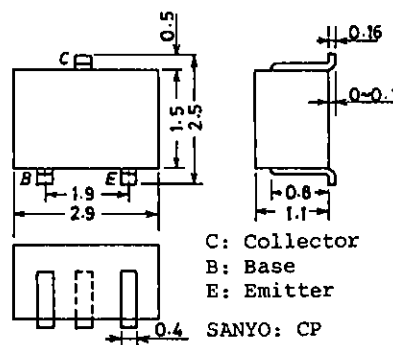

2SA1682

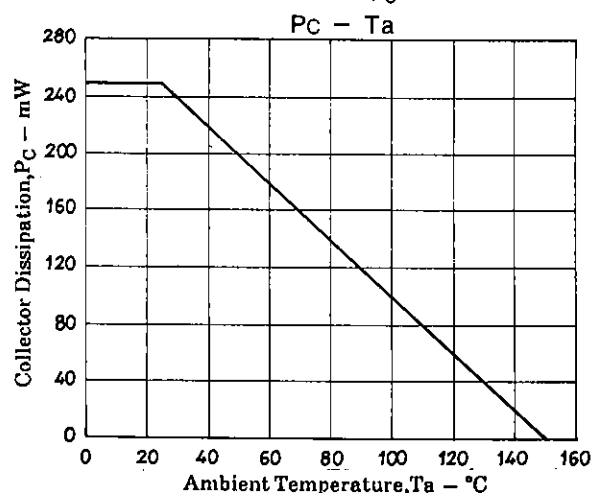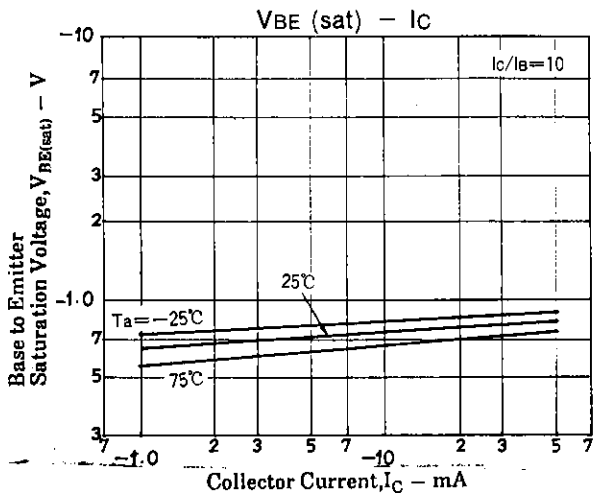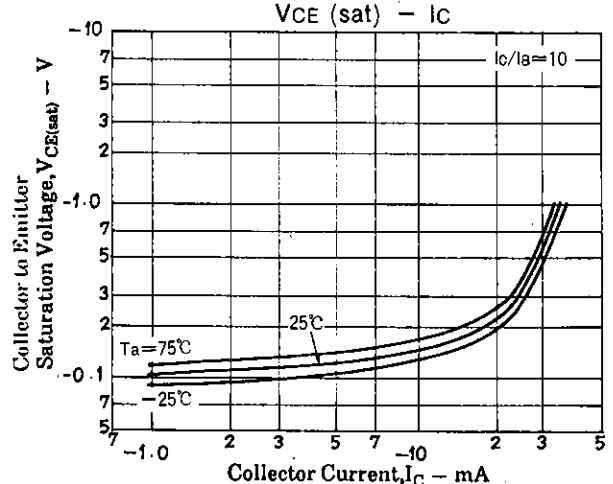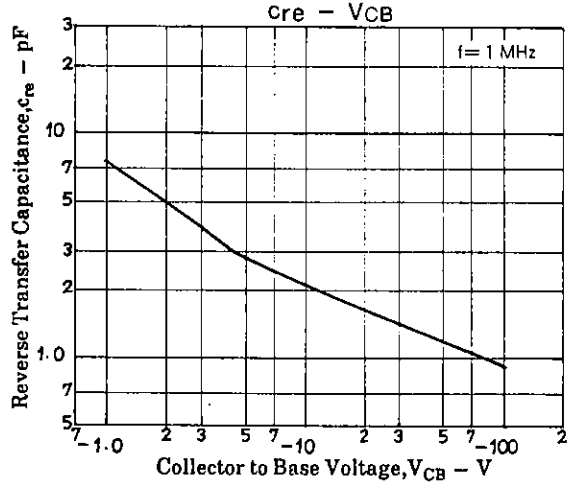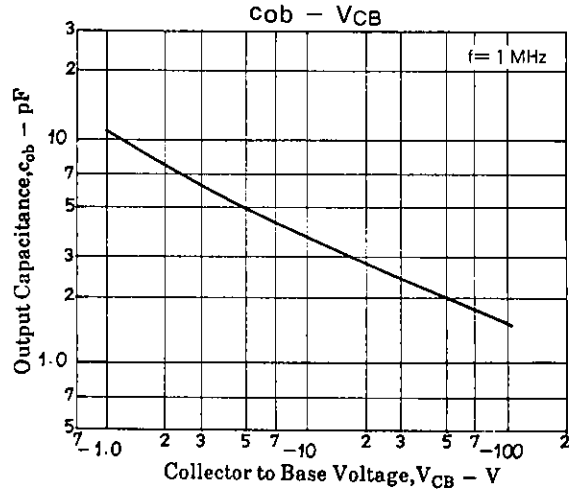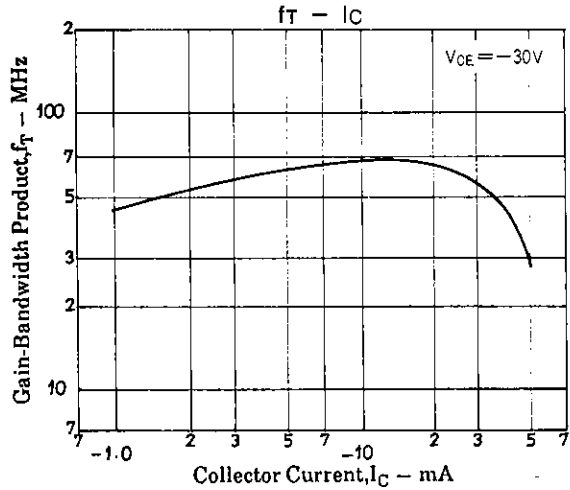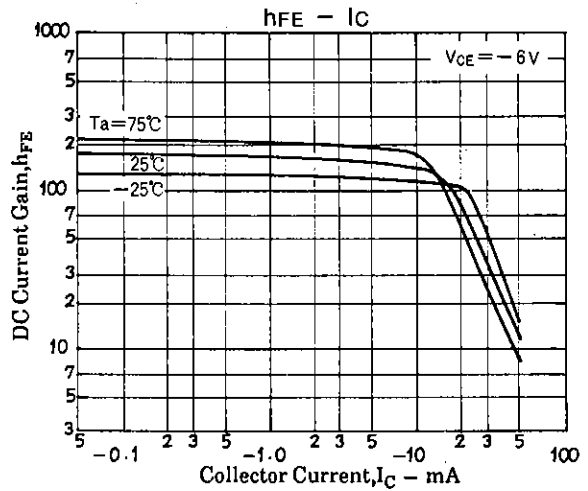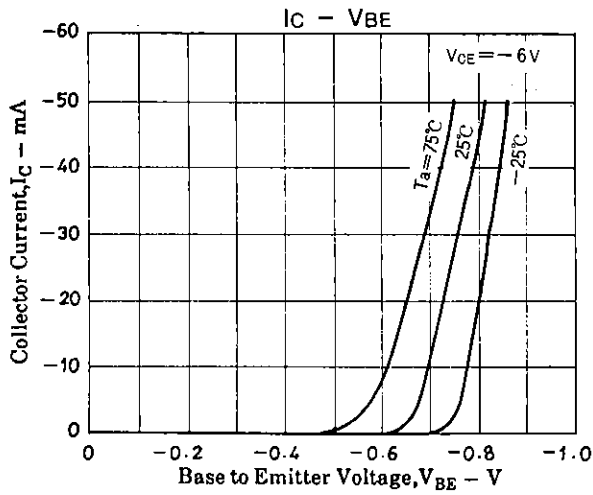

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.