


Features

Ideally Suited for Automatic Insertion
For Switching and AF Amplifier Applications
Ultra-Small Surface Mount Package
Lead Free/RoHS Compliant (Note 2)

Mechanical Data

Case: SOT-363
Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
Moisture Sensitivity: Level 1 per J-STD-020C
Terminals: Solderable per MIL-STD-202, Method 208
Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
Terminal Connections: See Diagram
Marking: K3W (See Page 3)
Ordering Information (See Page 3)
Weight: 0.006 grams

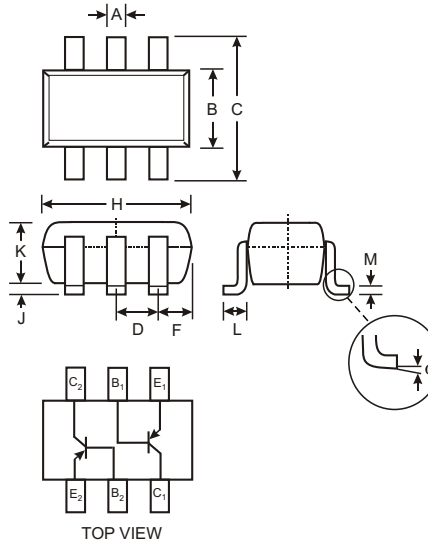

SOT-363		
Dim	Min	Max
A	0.10	0.30
B	1.15	1.35
C	2.00	2.20
D	0.65 Nominal	
F	0.30	0.40
H	1.80	2.20
J		0.10
K	0.90	1.00
L	0.25	0.40
M	0.10	0.25
	0	8°
All Dimensions in mm		

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V _{CB0}	-50	V
Collector-Emitter Voltage	V _{CEO}	-45	V
Emitter-Base Voltage	V _{EBO}	-5.0	V
Collector Current (Note 1)	I _C	-100	mA
Peak Collector Current (Note 1)	I _{CM}	-200	mA
Peak Base Current (Note 1)	I _{BM}	-200	mA
Power Dissipation at T _{SB} = 50°C (Note 1)	P _d	200	mW
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +125	°C

Notes: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
2. No purposefully added lead.

Electrical Characteristics @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
DC Current Gain (Note 3)	h_{FE}	220	—	475	—	$V_{CE} = -5.0\text{V}$, $I_C = -2.0\text{mA}$
Thermal Resistance, Junction to Ambient Air (Note 1)	R_{JA}	—	—	625	$^\circ\text{C/W}$	Note 1
Collector-Emitter Saturation Voltage (Note 3)	$V_{CE(SAT)}$	—	—	-100 -400	mV	$I_C = -10\text{mA}$, $I_B = -0.5\text{mA}$ $I_C = -100\text{mA}$, $I_B = -5.0\text{mA}$
Base-Emitter Saturation Voltage (Note 3)	$V_{BE(SAT)}$	—	-700	—	mV	$I_C = -10\text{mA}$, $I_B = -0.5\text{mA}$
Base-Emitter Voltage (Note 3)	V_{BE}	-580	-665	-750	mV	$V_{CE} = -5.0\text{V}$, $I_C = -2.0\text{mA}$
Collector Cutoff Current	I_{CBO}	—	—	-15	nA	$V_{CB} = -30\text{V}$, $I_E = 0$
Emitter Cutoff Current	I_{EBO}	—	—	-100	nA	$V_{EB} = -5.0\text{V}$, $I_C = 0$
Gain Bandwidth Product	f_T	100	—	—	MHz	$V_{CE} = -5.0\text{V}$, $I_C = -10\text{mA}$, $f = 100\text{MHz}$
Collector-Base Capacitance	C_{CBO}	—	—	3	pF	$V_{CB} = -10\text{V}$, $f = 1.0\text{MHz}$
Emitter-Base Capacitance	C_{EBO}	—	11	—	pF	$V_{EB} = -0.5\text{V}$, $f = 1.0\text{MHz}$

- Notes: 1. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. No purposefully added lead.
 3. Short duration test pulse used to minimize self-heating effect.

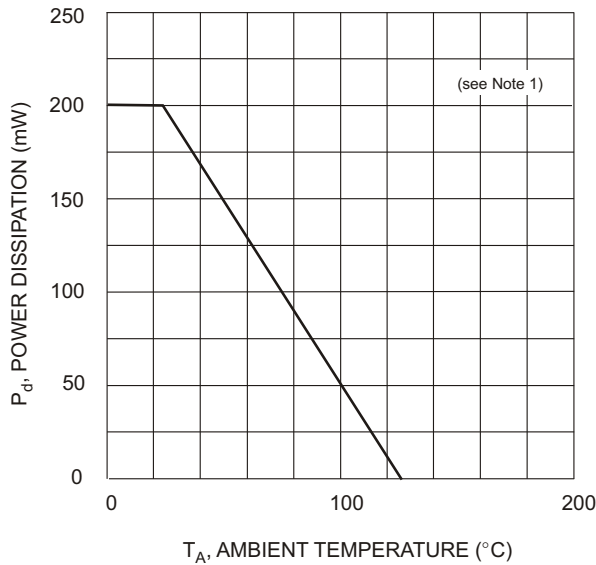


Fig. 1, Power Derating Curve

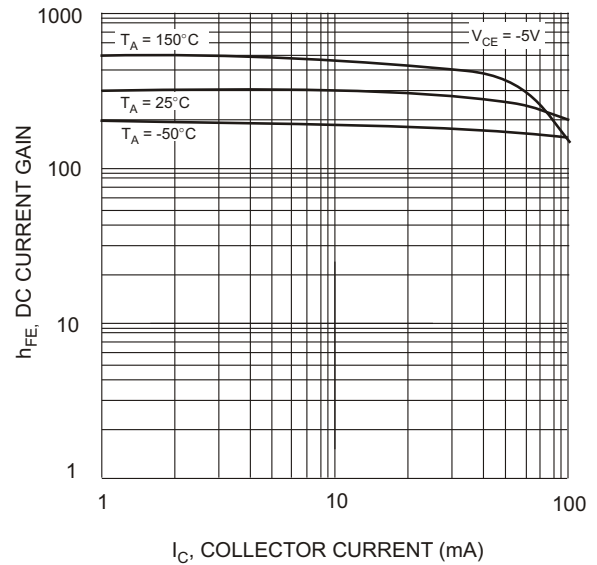


Fig. 2, DC Current Gain vs Collector Current

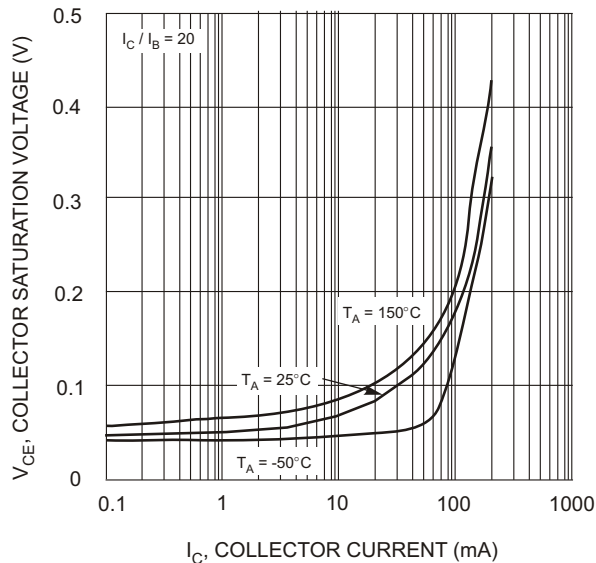


Fig. 3, Collector Saturation Voltage vs Collector Current

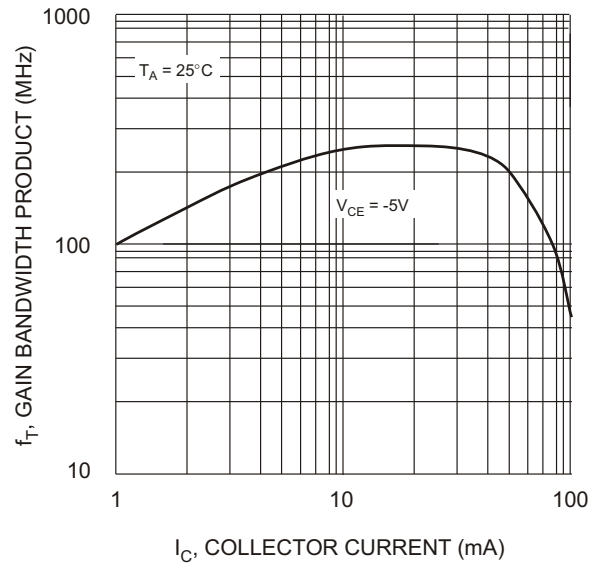



Fig. 4, Gain Bandwidth Product vs Collector Current

Ordering Information (Note 4)

Device	Packaging	Shipping
BC857BS-7-F	SOT-363	3000/Tape & Reel

Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



K3W = Product Type Marking Code
 YM = Date Code Marking
 Y = Year ex: N = 2002
 M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	N	P	R	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.