


Medium power transistor (–30V, –2A)

2SA2113

●Features

- 1) High speed switching. (T_f : Typ.: 20ns at $I_c = -2A$)
- 2) Low saturation voltage, typically
(Typ.: –200mV at $I_c = -1A$, $I_b = -0.1A$)
- 3) Strong discharge power for inductive load and capacitance load.
- 4) Complements the 2SC5916

●External dimensions (Units : mm)

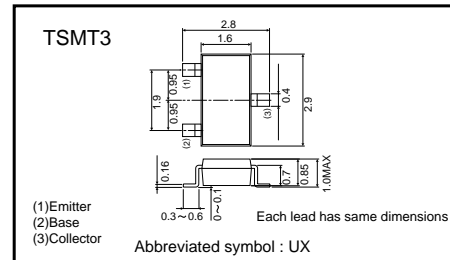

●Applications

Low frequency amplifier
High speed switching

●Structure

PNP Silicon epitaxial planar transistor

●Packaging specifications

Type	Package	Taping
	Code	TL
	Basic ordering unit (pieces)	3000
2SA2113		○

●Absolute maximum ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Limits	Unit
Collector-base voltage	V_{CB0}	–30	V
Collector-emitter voltage	V_{CE0}	–30	V
Emitter-base voltage	V_{EB0}	–6	V
Collector current	I_c	–2	A
	I_{CP}	–4	A *1
Power dissipation	P_C	500	mW *2
Junction temperature	T_j	150	$^\circ\text{C}$
Range of storage temperature	T_{stg}	–55~+150	$^\circ\text{C}$

*1 $P_w = 10\text{ms}$

*2 Each terminal mounted on a recommended land

Transistor

●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Collector-base breakdown voltage	BV _{CB0}	-30	-	-	V	I _C =-100μA
Collector-emitter breakdown voltage	BV _{CEO}	-30	-	-	V	I _C =-1mA
Emitter-base breakdown voltage	BV _{EB0}	-6	-	-	V	I _E =-100μA
Collector cut-off current	I _{CB0}	-	-	-1.0	μA	V _{CB} =-20V
Emitter cut-off current	I _{EB0}	-	-	-1.0	μA	V _{EB} =-4V
Collector-emitter saturation voltage	V _{CE(sat)}	-	-200	-400	mV	I _C =-1A, I _B =-0.1A *1
DC current gain	h _{FE}	120	-	390	-	V _{CE} =-2V, I _C =-100mA
Transition frequency	f _r	-	350	-	MHz	V _{CE} =-10V, I _E =100mA, f=10MHz *1
Collector output capacitance	C _{ob}	-	25	-	pF	V _{CB} =-10V, I _E =0mA, f=1MHz
Turn-on time	T _{on}	-	25	-	ns	I _C =-2A
Storage time	T _{stg}	-	100	-	ns	I _{B1} =-200mA I _{B2} =200mA
Fall time	T _f	-	20	-	ns	V _{CC} ≒-25V *2

*1 Non repetitive pulse

*2 See switching characteristics measurement circuit

●h_{FE} RANK

Q	R
120-270	180-390

●Electrical characteristic curves

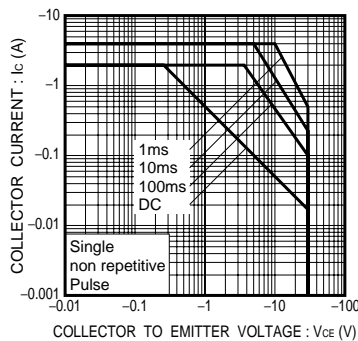


Fig.1 Safe Operating Area

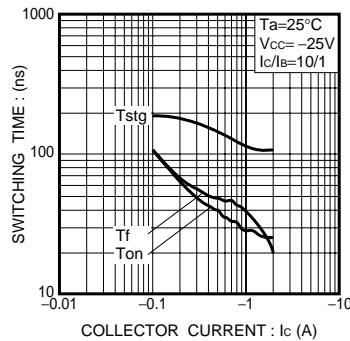


Fig.2 Switching Time

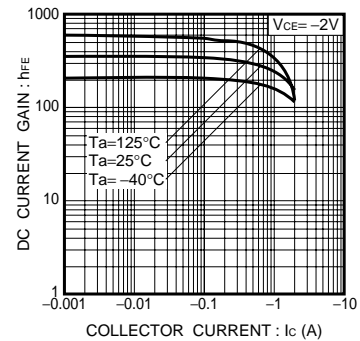


Fig.3 DC Current Gain vs. Collector Current (I)

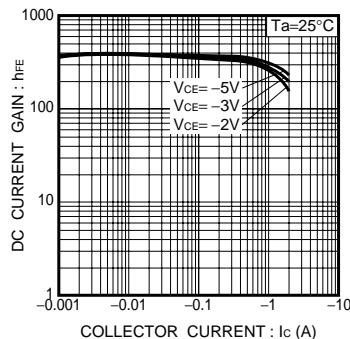


Fig.4 DC Current Gain vs. Collector Current (II)

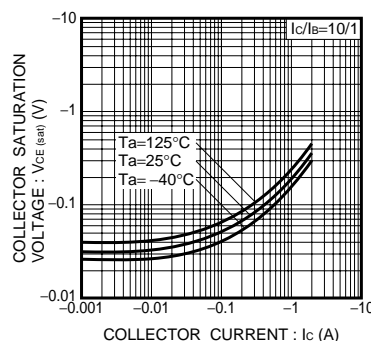


Fig.5 Collector-Emitter Saturation Voltage vs. Collector Current (I)

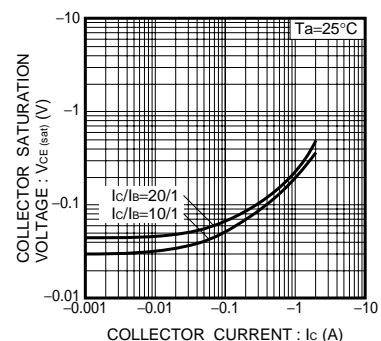


Fig.6 Collector-Emitter Saturation Voltage vs. Collector Current (II)

Transistor

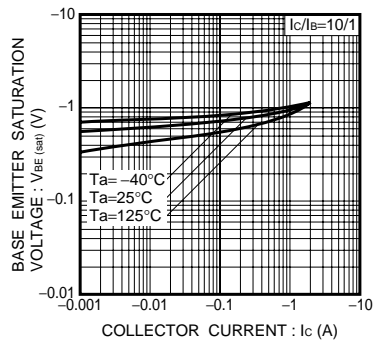


Fig.7 Base-Emitter Saturation Voltage vs. Collector Current

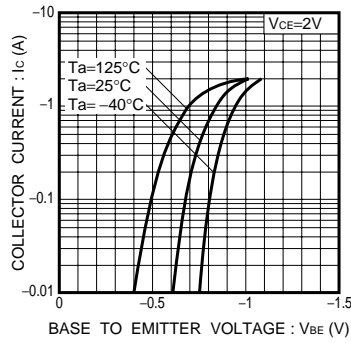


Fig.8 Grounded Emitter Propagation Characteristics

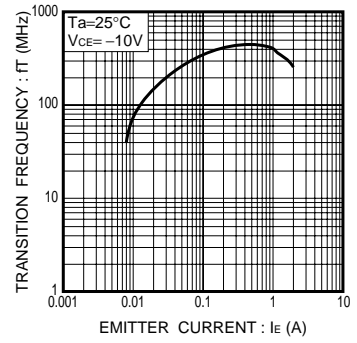


Fig.9 Transition Frequency


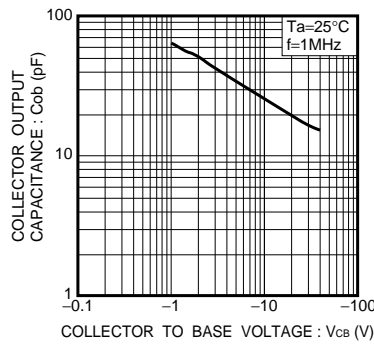


Fig.10 Collector Output Capacitance

●Switching characteristics measurement circuits

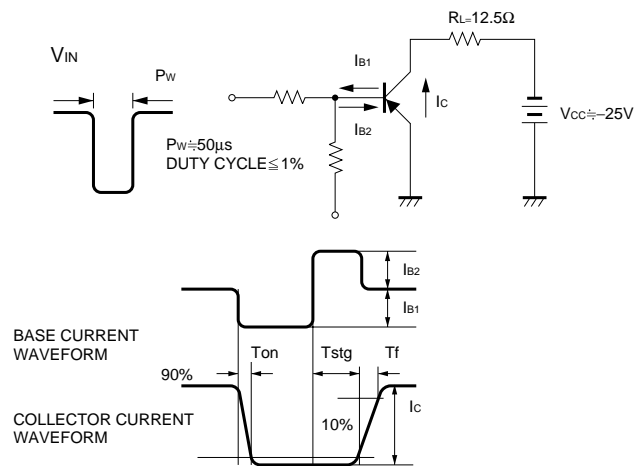

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.