


[Products](#)

[▼ Technical](#)

[▼ About Us](#)

[▼ Contact Us](#)

Catalog Part Search:

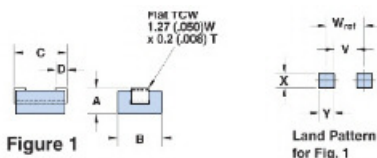

Part Number: 2743021447
Frequency Range: Broadband Frequencies 25-300 MHz (43 & 44 materials)
Description: BDS2.9/3.1/9.1-43-1 43 SM BEAD
Application: Suppression Components
Where Used: Board Component
Part Type: SM Beads (Differential-Mode)
Preferred Part: ✓

Part Type Information

Mechanical Specifications

Weight: 0.30 (g)

[View Chart Legend](#)

Dim	mm	mm tol	nominal inch	inch misc.	Land Patterns					Winding Information				
					V	W (ref)	X	Y	Z	Turns Tested	Wire Size	1st Wire Length	2	
A	2.85	±0.20	0.112	-	4.500	7.500	1.800	3.000	-	-	-	-	-	-
B	3.05	±0.10	0.120	-	0.177	0.295	0.071	0.118	-	-	-	-	-	-
C	9.60	-0.95	0.359	-	Reel Information					Pkg Size				
D	1.50	±0.50	0.059	-	Tape Width mm	Pitch mm	Parts 7" Reel	Parts 13" Reel	Parts 14" Reel	-				
E	-	-	-	-	16	8	-	2800	-	Connector Plate				
F	-	-	-	-	Cable Information					# Holes		# Ro		
G	-	-	-	-	Max Diameter	Max Dimension	Solid Equivalent		Flat Ca Core		-			
H	-	-	-	-	-	-	-		-		-			
J	-	-	-	-										
K	-	-	-	-										

Electrical Specifications

Typical Impedance (Ω)	
10 MHz	37
25 MHz ⁺	56
100 MHz ⁺	95
250 MHz	100

Electrical Properties	
Max Rdc(mΩ)	1.20

43 Material Specifications:

Property	Unit	Symbol	Value
Initial Permeability @ B < 10 gauss		μ _i	800
Flux Density @ Field Strength	gauss oersted	B H	2900 10
Residual Flux Density	gauss	B _r	1300
Coercive Force	oersted	H _c	0.45
Loss Factor @ Frequency	10 ⁻⁶ MHz	tan δ/μ _i	250 1.0
Temperature Coefficient of Initial Permeability (20 -70°C)	%/°C		1.25
Curie Temperature	°C	T _c	>130
Resistivity	Ω cm	ρ	1x10 ⁵

Ferrite Material Constants

Specific Heat	0.25 cal/g
Thermal Conductivity	10x10 ⁻³ ca
Coefficient of Linear Expansion	8 - 10x10 ⁻⁴
Tensile Strength	4.9 kgf/mm
Compressive Strength	42 kgf/mm
Young's Modulus	15x10 ³ kgf
Hardness (Knoop)	650
Specific Gravity	≈ 4.7 g/cm

The above quoted properties are typical for Fair-Rite MnZn and I