


BYM07-50 THRU BYM07-400 EGL34A THRU EGL34G

SURFACE MOUNT GLASS PASSIVATED JUNCTION FAST EFFICIENT RECTIFIER
Reverse Voltage - 50 to 400 Volts Forward Current - 0.5 Ampere

PATENTED*

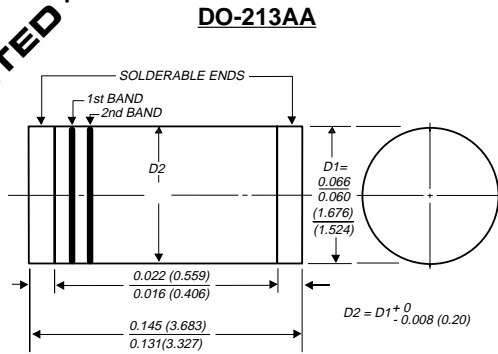

1st band denotes type and polarity
 2nd band denotes voltage type

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation is covered by

Patent No. 3,996,602 and brazed-lead assembly to Patent No. 3,930,306



FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ For surface mount applications
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Fast switching for high efficiency
- ◆ High temperature soldering guaranteed:
 450°C/5 seconds at terminals. Complete device submersible temperature of 260°C for 10 seconds in solder bath



MECHANICAL DATA

Case: JEDEC DO-213AA molded plastic over glass body

Terminals: Plated terminals, solderable per MIL-STD-750, Method 2026

Polarity: Two bands indicate cathode end -1st band denotes device type and 2nd band denotes repetitive peak reverse voltage rating

Mounting Position: Any

Weight: 0.0014 ounce, 0.036 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	BYM07 -50	BYM07 -100	BYM07 -150	BYM07 -200	BYM07 -300	BYM07 -400	UNITS
Fast efficient device: 1st band is Green		EGL34A	EGL34B	EGL34C	EGL34D	EGL34F	EGL34G	
Polarity color bands (2nd Band)		GRAY	RED	PINK	ORANGE	BROWN	YELLOW	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	Volts
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	Volts
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	Volts
Maximum average forward rectified current at $T_T=75^\circ\text{C}$	$I_{(AV)}$	0.5						Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	10.0						Amps
Maximum instantaneous forward voltage at 0.5A	V_F	1.25				1.35		Volts
Maximum DC reverse current at rated DC blocking voltage	I_R	$T_A=25^\circ\text{C}$ 5.0				$T_A=125^\circ\text{C}$ 50.0		μA
Maximum full load reverse current, full cycle average at $T_A=55^\circ\text{C}$	$I_{R(AV)}$	50.0						μA
Maximum reverse recovery time (NOTE 1)	t_{rr}	50.0						ns
Typical junction capacitance (NOTE 2)	C_J	7.0						pF
Maximum thermal resistance (NOTE 3) (NOTE 4)	$R_{\theta JA}$ $R_{\theta JT}$	150.0				70.0		$^\circ\text{C/W}$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175						$^\circ\text{C}$

NOTES:

- (1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient, 0.24 x 0.24" (6.0 x 6.0mm) copper pads to each terminal
- (4) Thermal resistance from junction to terminal, 0.24 x 0.24" (6.0 x 6.0mm) copper pads to each terminal

RATINGS AND CHARACTERISTIC CURVES BYM07-50 THRU BYM07-400 / EGL34A THRU EGL34G

FIG. 1 - FORWARD CURRENT DERATING CURVE

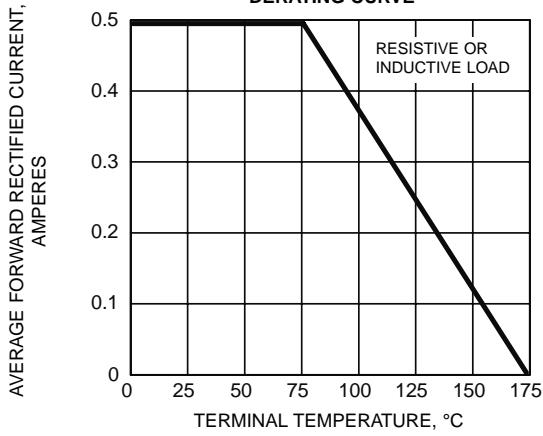


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

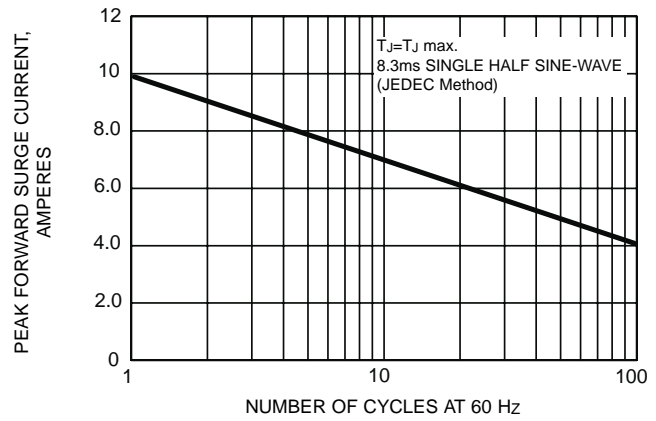


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

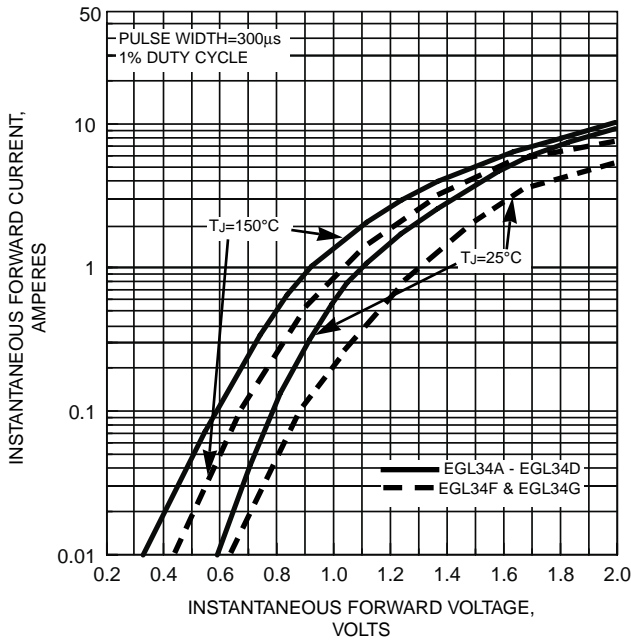


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

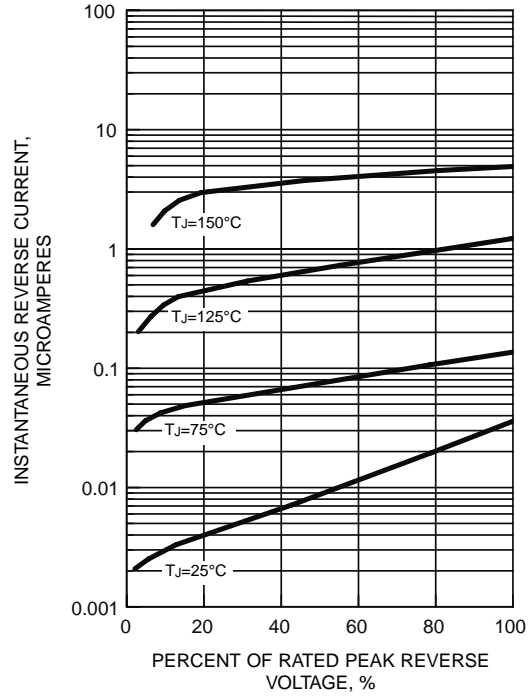


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

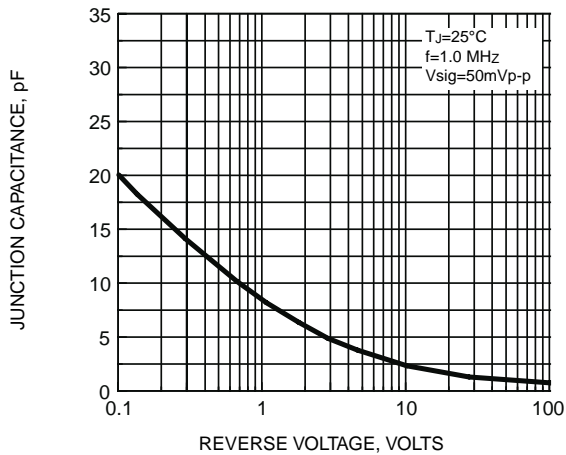


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

