




P-Channel 1.8-V (G-S) MOSFET


PRODUCT SUMMARY		
V_{DS} (V)	$r_{DS(on)}$ (Ω)	I_D (A)
-8	0.280 @ $V_{GS} = -4.5$ V	± 0.92
	0.380 @ $V_{GS} = -2.5$ V	± 0.79
	0.530 @ $V_{GS} = -1.8$ V	± 0.67



ESD Protected
3000 V

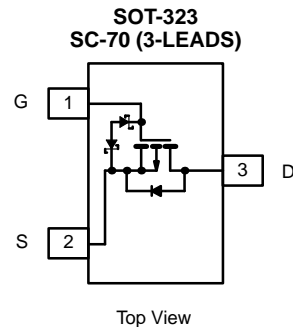

Marking Code

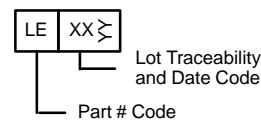

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)					
Parameter	Symbol	5 secs	Steady State	Unit	
Drain-Source Voltage	V_{DS}	-8		V	
Gate-Source Voltage	V_{GS}	± 8			
Continuous Drain Current ($T_J = 150^\circ\text{C}$) ^a	I_D	$T_A = 25^\circ\text{C}$	± 0.92	± 0.86	A
		$T_A = 70^\circ\text{C}$	± 0.74	± 0.69	
Pulsed Drain Current	I_{DM}	± 3			
Continuous Diode Current (Diode Conduction) ^a	I_S	-0.28	-0.24		
Maximum Power Dissipation ^a	P_D	$T_A = 25^\circ\text{C}$	0.34	0.29	W
		$T_A = 70^\circ\text{C}$	0.22	0.19	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 150		$^\circ\text{C}$	

THERMAL RESISTANCE RATINGS					
Parameter	Symbol	Typical	Maximum	Unit	
Maximum Junction-to-Ambient ^a	R_{thJA}	$t \leq 5$ sec	315	375	$^\circ\text{C/W}$
		Steady State	360	430	
Maximum Junction-to-Foot (Drain)	R_{thJF}	285	340		

Notes

a. Surface Mounted on 1" x 1" FR4 Board.





SPECIFICATIONS (T _J = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250 μA	-045			V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±4.5 V			±1	μA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -6.4 V, V _{GS} = 0 V			-1	μA
		V _{DS} = -6.4 V, V _{GS} = 0 V, T _J = 70 °C			-5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} = -5 V, V _{GS} = -4.5 V	-3			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = -4.5 V, I _D = -1 A		0.230	0.280	Ω
		V _{GS} = -2.5 V, I _D = -0.5 A		0.315	0.380	
		V _{GS} = -1.8 V, I _D = -0.3 A		0.440	0.530	
Forward Transconductance ^a	g _{fs}	V _{DS} = -5 V, I _D = -1 A		3.5		S
Diode Forward Voltage ^a	V _{SD}	I _S = -1 A, V _{GS} = 0 V			-1.2	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = -4 V, V _{GS} = -4.5 V, I _D = -1 A		2.6	4	nC
Gate-Source Charge	Q _{gs}			0.54		
Gate-Drain Charge	Q _{gd}			0.52		
Turn-On Delay Time	t _{d(on)}	V _{DD} = -4 V, R _L = 4 Ω I _D ≅ -1 A, V _{GEN} = -4.5 V, R _G = 6 Ω		206	330	ns
Rise Time	t _r			431	690	
Turn-Off Delay Time	t _{d(off)}			1350	2160	
Fall Time	t _f			1000	1600	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = -1 A, di/dt = 100 A/μs		500	800	

Notes

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

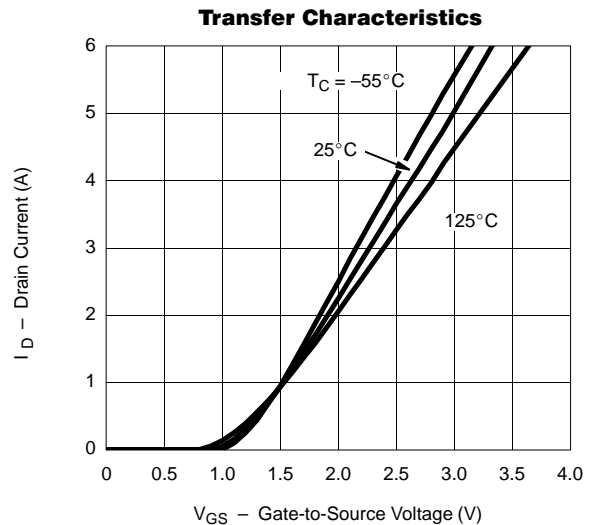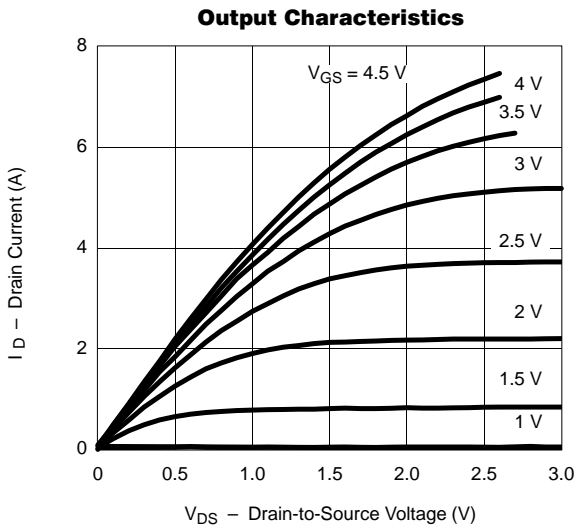




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


On-Resistance vs. Drain Current

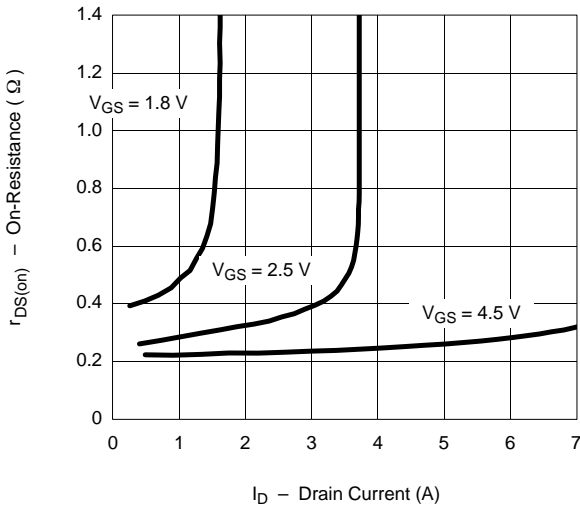


Capacitance

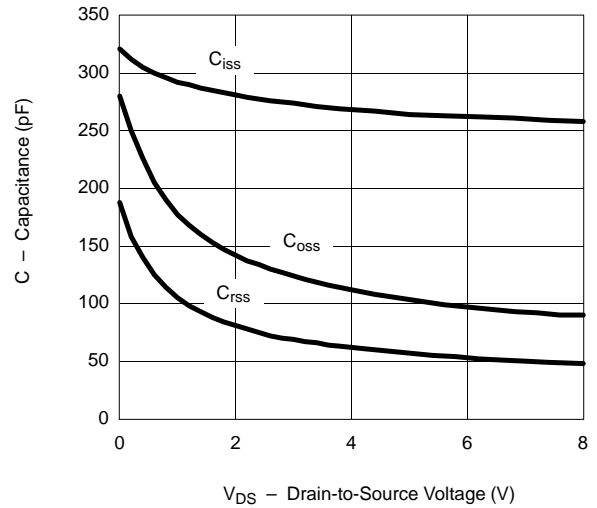


Gate Charge

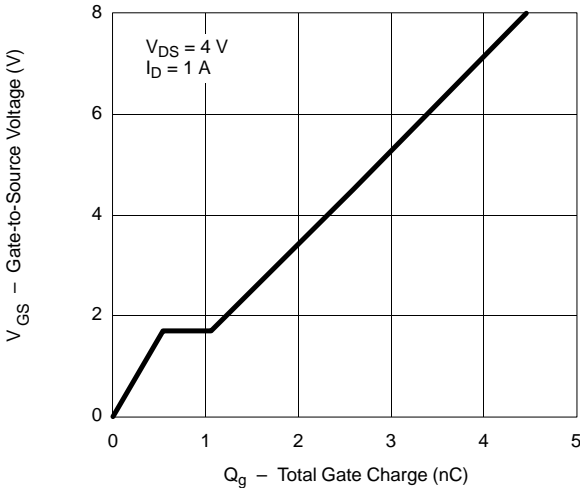


On-Resistance vs. Junction Temperature

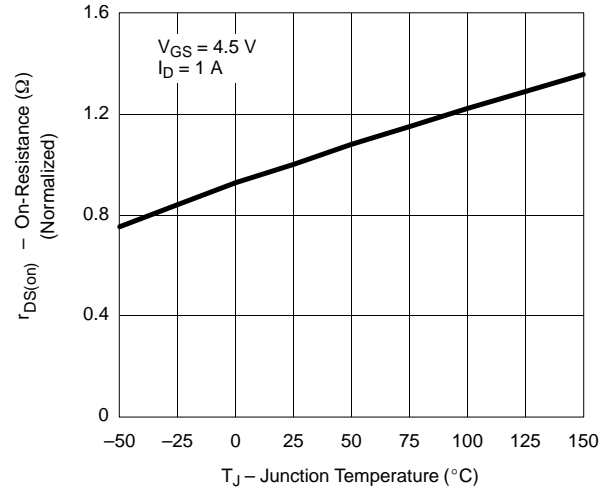

Source-Drain Diode Forward Voltage

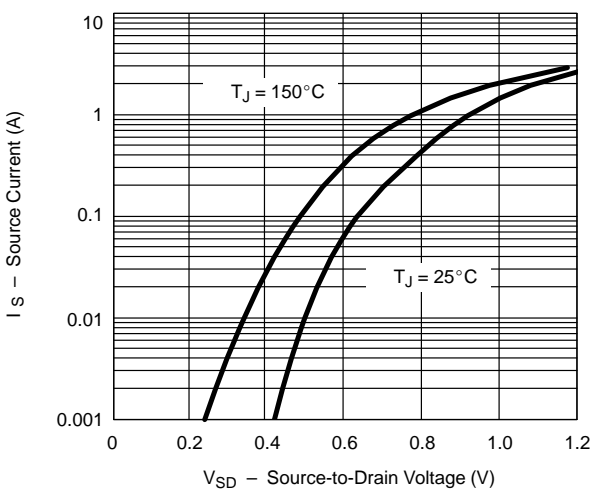


On-Resistance vs. Gate-to-Source Voltage

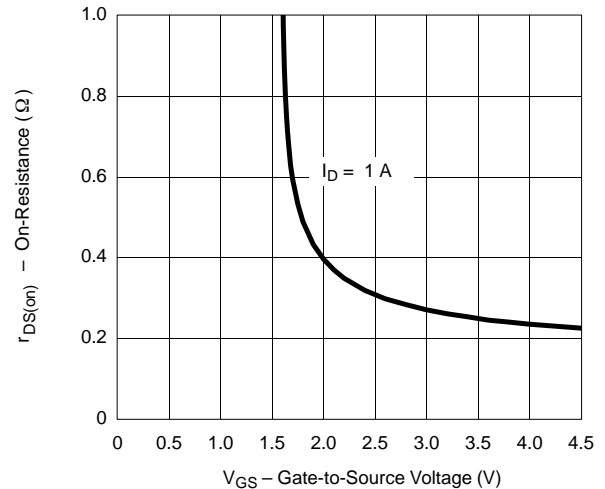




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Gate-Current vs. Gate-Source Voltage

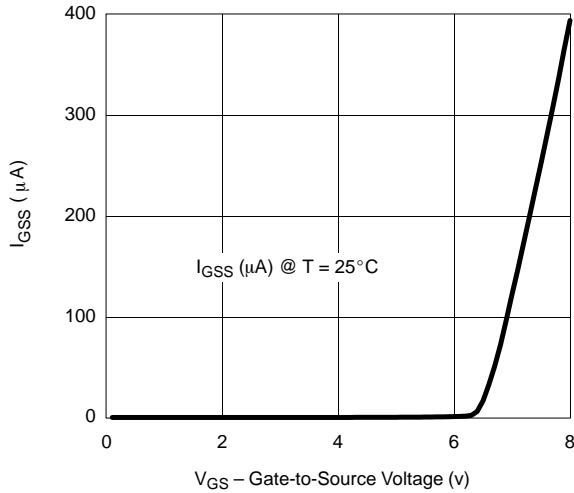


Gate-Source Voltage vs. Gate-Current

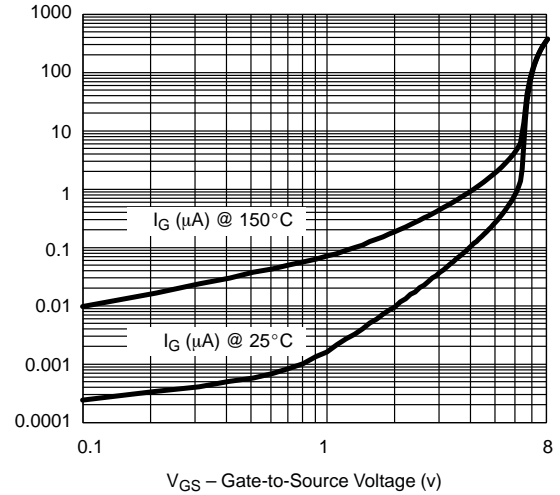


Threshold Voltage

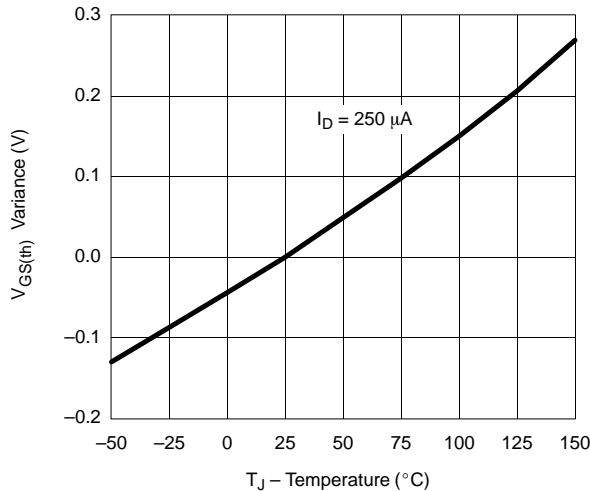

Single Pulse Power

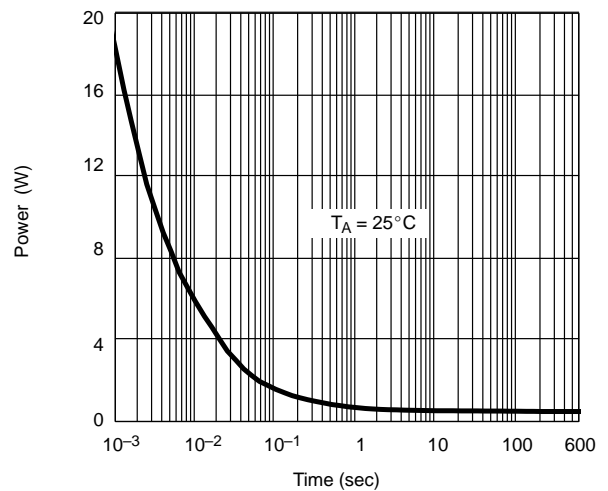


Normalized Thermal Transient Impedance, Junction-to-Ambient

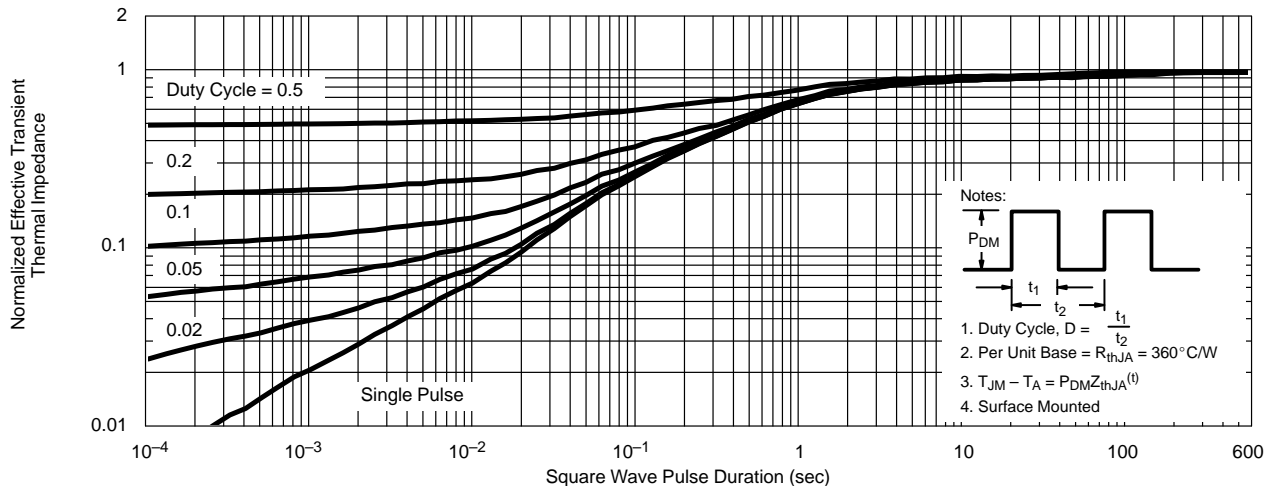



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

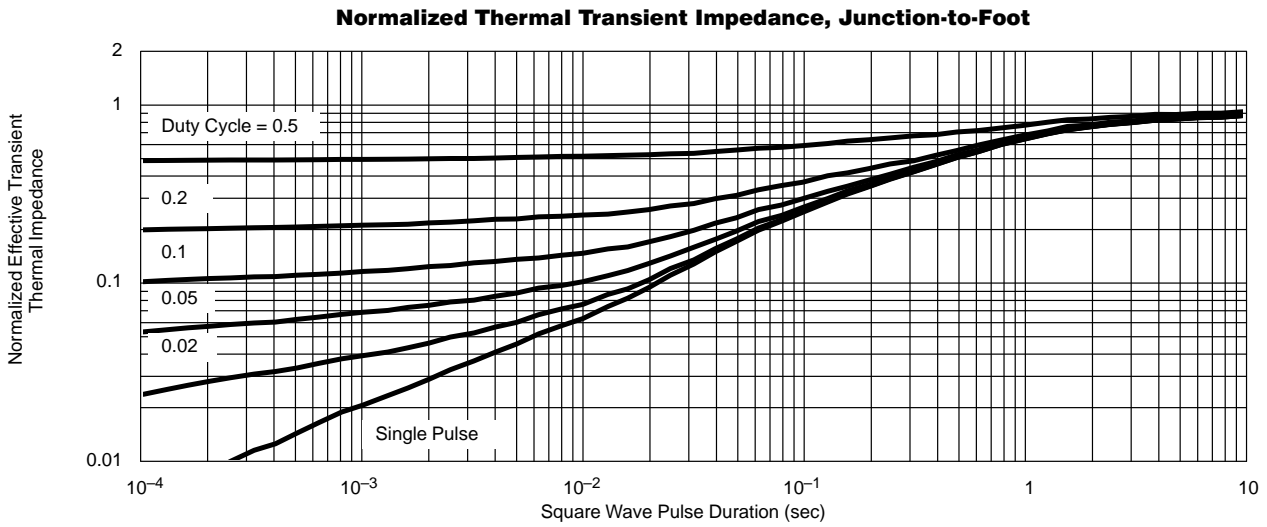



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.