

## P-Channel 12-V (D-S) MOSFET



PRODUCT SUMMARY		
$V_{DS}$ (V)	$r_{DS(on)}$ ( $\Omega$ )	$I_D$ (A)
-12	0.023 @ $V_{GS} = -4.5$ V	-7.9
	0.029 @ $V_{GS} = -2.5$ V	-7.0
	0.041 @ $V_{GS} = -1.8$ V	-5.9

### FEATURES

- TrenchFET® Power MOSFET: 1.8-V Rated
- Ultra Low On-Resistance

### APPLICATIONS

- Load Switch
- PA Switch

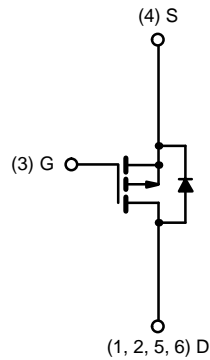

P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)					
Parameter	Symbol	5 secs	Steady State	Unit	
Drain-Source Voltage	$V_{DS}$	-12		V	
Gate-Source Voltage	$V_{GS}$	$\pm 8$			
Continuous Drain Current ( $T_J = 150^\circ\text{C}$ ) <sup>a</sup>	$I_D$	$T_A = 25^\circ\text{C}$	-7.9	-5.9	A
		$T_A = 85^\circ\text{C}$	-5.7	-4.3	
Pulsed Drain Current	$I_{DM}$	-20			
Continuous Diode Current (Diode Conduction) <sup>a</sup>	$I_S$	-1.7	-0.9		
Maximum Power Dissipation <sup>a</sup>	$P_D$	$T_A = 25^\circ\text{C}$	2.0	1.1	W
		$T_A = 85^\circ\text{C}$	1.0	0.6	
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	-55 to 150		$^\circ\text{C}$	

THERMAL RESISTANCE RATINGS					
Parameter		Symbol	Typical	Maximum	Unit
Maximum Junction-to-Ambient <sup>a</sup>	$t \leq 5$ sec	$R_{thJA}$	45	62.5	$^\circ\text{C/W}$
	Steady State		90	110	
Maximum Junction-to-Foot (Drain)	Steady State	$R_{thJF}$	25	30	

Notes

a. Surface Mounted on 1" x 1" FR4 Board.





SPECIFICATIONS (T <sub>J</sub> = 25 °C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Static</b>						
Gate Threshold Voltage	V <sub>GS(th)</sub>	V <sub>DS</sub> = V <sub>GS</sub> , I <sub>D</sub> = -250 μA	-0.40		-1	V
Gate-Body Leakage	I <sub>GSS</sub>	V <sub>DS</sub> = 0 V, V <sub>GS</sub> = ±8 V			±100	nA
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>DS</sub> = -9.6 V, V <sub>GS</sub> = 0 V			-1	μA
		V <sub>DS</sub> = -9.6 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 85 °C			-5	
On-State Drain Current <sup>a</sup>	I <sub>D(on)</sub>	V <sub>DS</sub> = -5 V, V <sub>GS</sub> = -4.5 V	-20			A
Drain-Source On-State Resistance <sup>a</sup>	r <sub>DS(on)</sub>	V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -7.9 A		0.019	0.023	Ω
		V <sub>GS</sub> = -2.5 V, I <sub>D</sub> = -7.0 A		0.024	0.029	
		V <sub>GS</sub> = -1.8 V, I <sub>D</sub> = -3 A		0.033	0.041	
Forward Transconductance <sup>a</sup>	g <sub>fs</sub>	V <sub>DS</sub> = -5 V, I <sub>D</sub> = -7.9 A		28		S
Diode Forward Voltage <sup>a</sup>	V <sub>SD</sub>	I <sub>S</sub> = -1.7 A, V <sub>GS</sub> = 0 V		-0.7	-1.2	V
<b>Dynamic<sup>b</sup></b>						
Total Gate Charge	Q <sub>g</sub>	V <sub>DS</sub> = -6 V, V <sub>GS</sub> = -4.5 V, I <sub>D</sub> = -7.9 A		22	33	nC
Gate-Source Charge	Q <sub>gs</sub>			3.2		
Gate-Drain Charge	Q <sub>gd</sub>			5.8		
Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>DD</sub> = -6 V, R <sub>L</sub> = 6 Ω I <sub>D</sub> ≅ -1 A, V <sub>GEN</sub> = -4.5 V, R <sub>G</sub> = 6 Ω		25	40	ns
Rise Time	t <sub>r</sub>			50	75	
Turn-Off Delay Time	t <sub>d(off)</sub>			130	200	
Fall Time	t <sub>f</sub>			110	165	
Source-Drain Reverse Recovery Time	t <sub>rr</sub>		I <sub>F</sub> = -1.7 A, di/dt = 100 A/μs		65	

**Notes**

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.


### TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

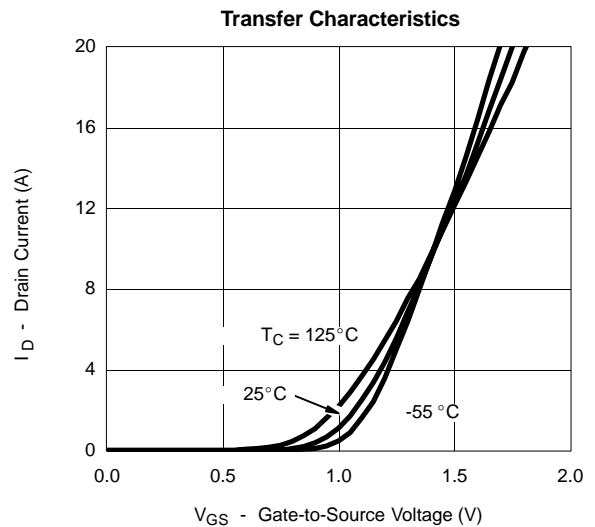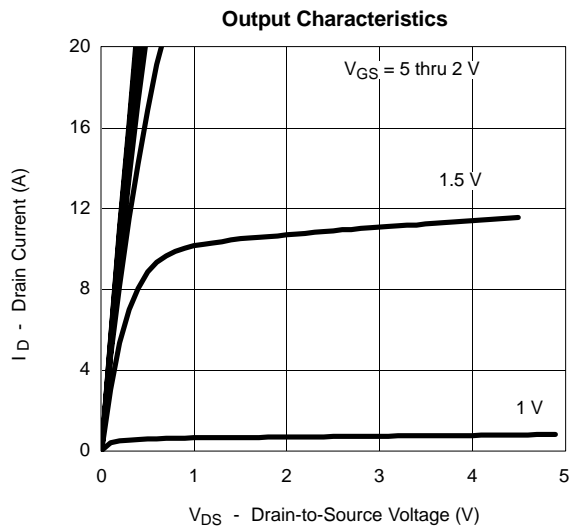




**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**


**On-Resistance vs. Drain Current**

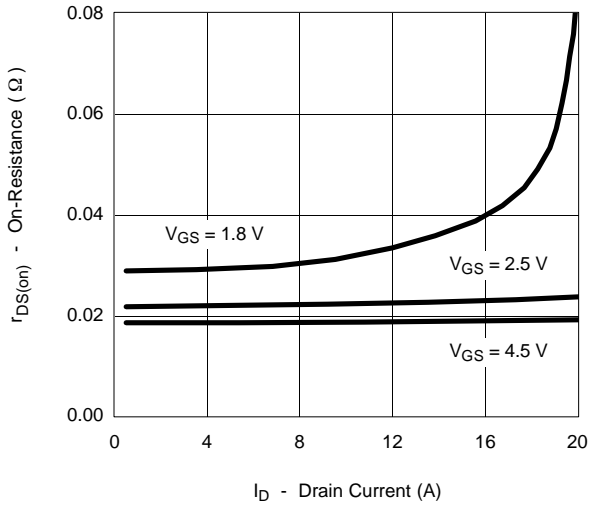


**Capacitance**

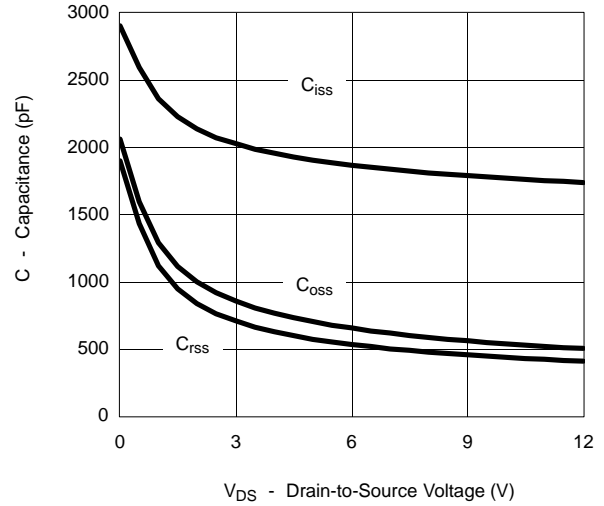


**Gate Charge**

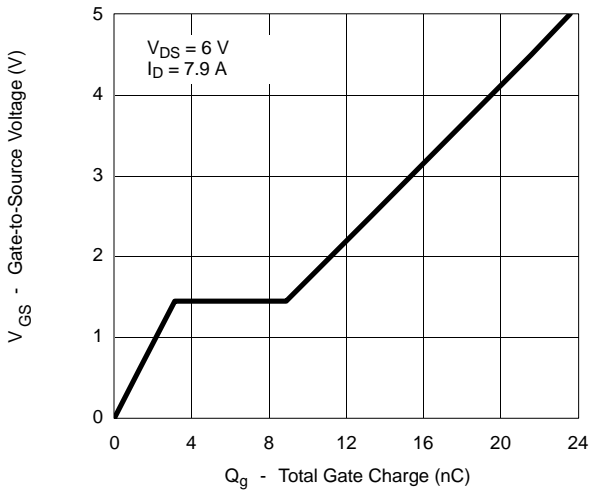


**On-Resistance vs. Junction Temperature**

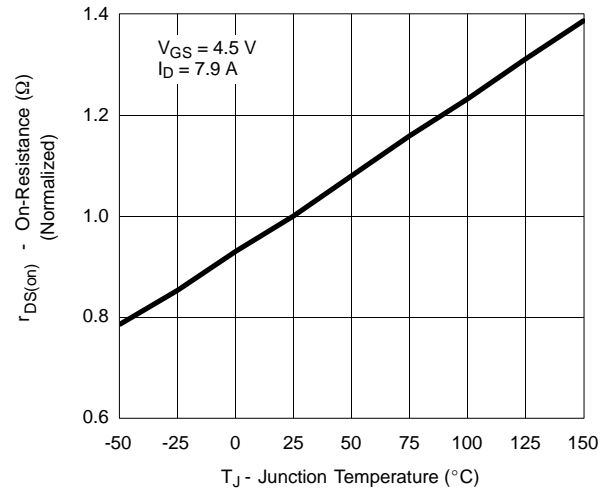

**Source-Drain Diode Forward Voltage**




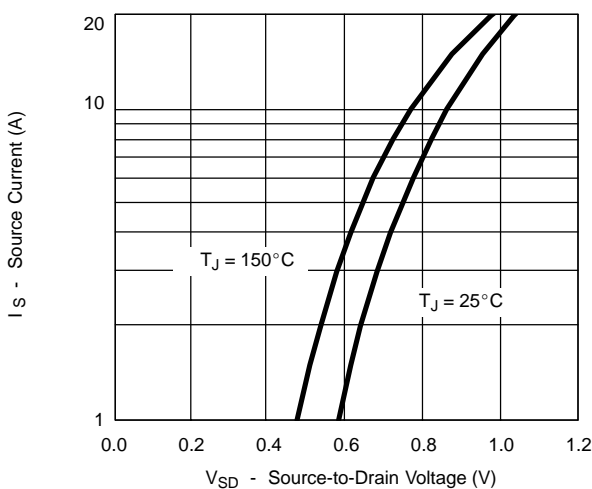


**On-Resistance vs. Gate-to-Source Voltage**

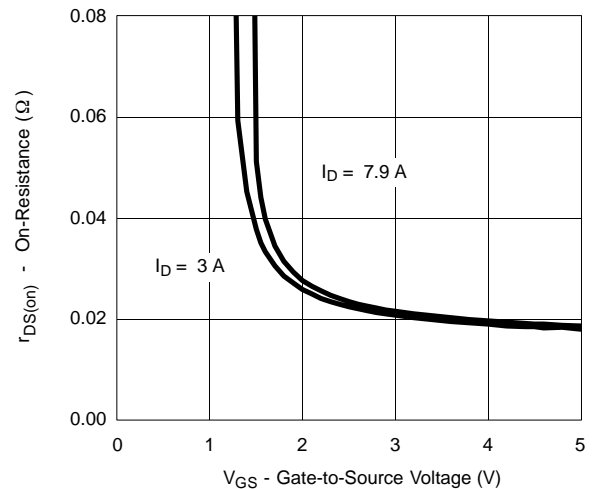



**TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)**

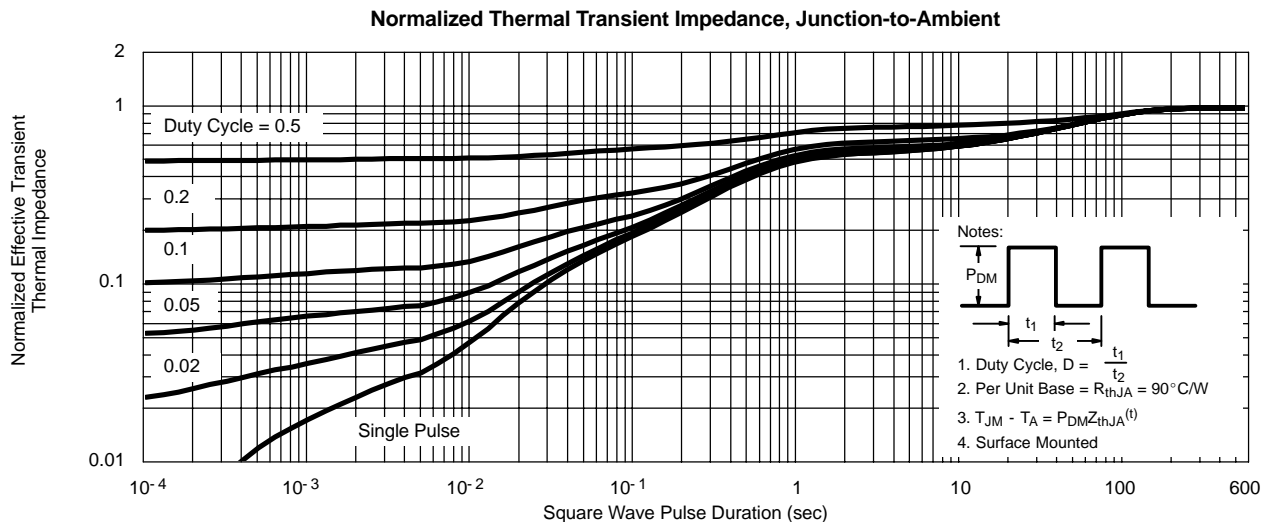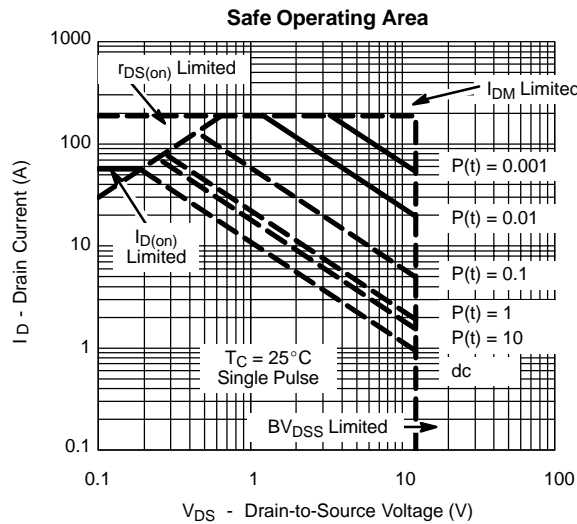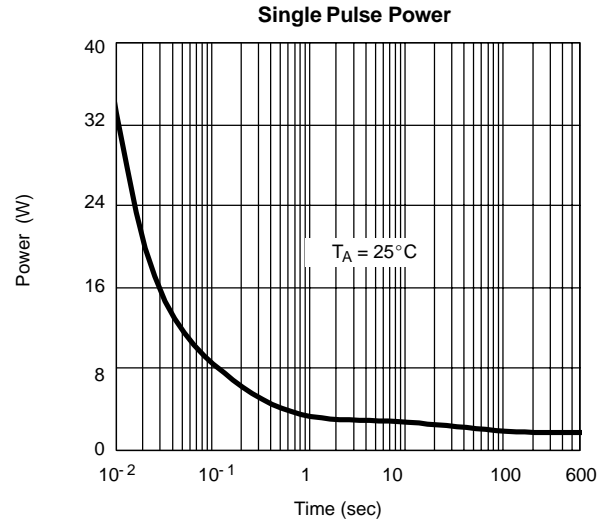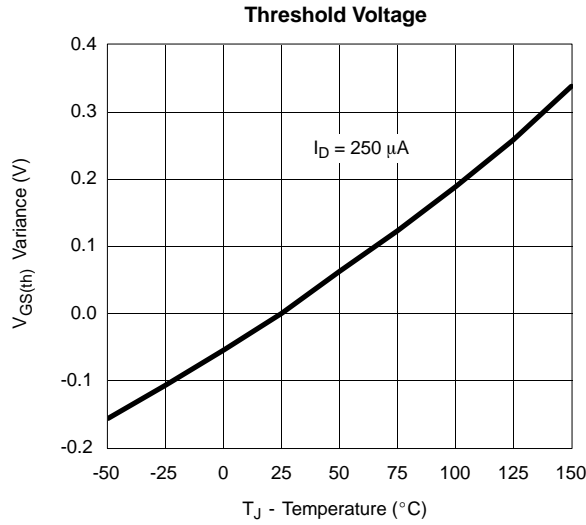



**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

