

# MBRS1100T3, MBRS190T3

Preferred Devices

## Schottky Power Rectifier

### Surface Mount Power Package

Schottky Power Rectifiers employ the use of the Schottky Barrier principle in a large area metal-to-silicon power diode. State-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes, in surface mount applications where compact size and weight are critical to the system. These state-of-the-art devices have the following features:

- Small Compact Surface Mountable Package with J-Bend Leads
- Rectangular Package for Automated Handling
- Highly Stable Oxide Passivated Junction
- High Blocking Voltage — 100 Volts
- 150°C Operating Junction Temperature
- Guardring for Stress Protection

#### Mechanical Characteristics

- Case: Epoxy, Molded
- Weight: 95 mg (approximately)
- Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- Lead and Mounting Surface Temperature for Soldering Purposes: 260°C Max. for 10 Seconds
- Shipped in 12 mm Tape and Reel, 2500 units per reel
- Cathode Polarity Band
- Markings; MBRS190T3: B19  
MBRS1100T3: B1C

#### MAXIMUM RATINGS

| Rating  | Symbol                          | Value       | Unit |
|---|---------------------------------|-------------|------|
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage MBRS190T3<br>MBRS1100T3    | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 90<br>100   | V    |
| Average Rectified Forward Current<br>$T_L = 120^\circ\text{C}$<br>$T_L = 100^\circ\text{C}$                       | $I_{F(AV)}$                     | 1.0<br>2.0  | A    |
| Non-Repetitive Peak Surge Current<br>(Surge Applied at Rated Load<br>Conditions Halfwave, Single<br>Phase, 60 Hz) | $I_{FSM}$                       | 50          | A    |
| Operating Junction Temperature  | $T_J$                           | -65 to +150 | °C   |
| Voltage Rate of Change  | dv/dt                           | 10          | V/ns |



ON Semiconductor™


<http://onsemi.com>

**SCHOTTKY BARRIER  
RECTIFIER  
1.0 AMPERE  
90, 100 VOLTS**



**SMB  
CASE 403A  
PLASTIC**

#### MARKING DIAGRAM



B1x = Device Code  
x = 9 or C

#### ORDERING INFORMATION

| Device     | Package | Shipping         |
|------------|---------|------------------|
| MBRS1100T3 | SMB     | 2500/Tape & Reel |
| MBRS190T3  | SMB     | 2500/Tape & Reel |

Preferred devices are recommended choices for future use and best overall value.

# MBRS1100T3, MBR5190T3

## THERMAL CHARACTERISTICS

| Rating   | Symbol          | Value | Unit               |
|--|-----------------|-------|--------------------|
| Thermal Resistance — Junction to Lead ( $T_L = 25^\circ\text{C}$ ) | $R_{\theta JL}$ | 22    | $^\circ\text{C/W}$ |

## ELECTRICAL CHARACTERISTICS

|  |       |            |       |
|--|-------|------------|-------|
| Maximum Instantaneous Forward Voltage (Note 1.)<br>( $i_F = 1.0\text{ A}$ , $T_J = 25^\circ\text{C}$ )   | $V_F$ | 0.75       | Volts |
| Maximum Instantaneous Reverse Current (Note 1.)<br>(Rated dc Voltage, $T_J = 25^\circ\text{C}$ )<br>(Rated dc Voltage, $T_J = 100^\circ\text{C}$ ) | $I_R$ | 0.5<br>5.0 | mA    |

1. Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

## TYPICAL ELECTRICAL CHARACTERISTICS

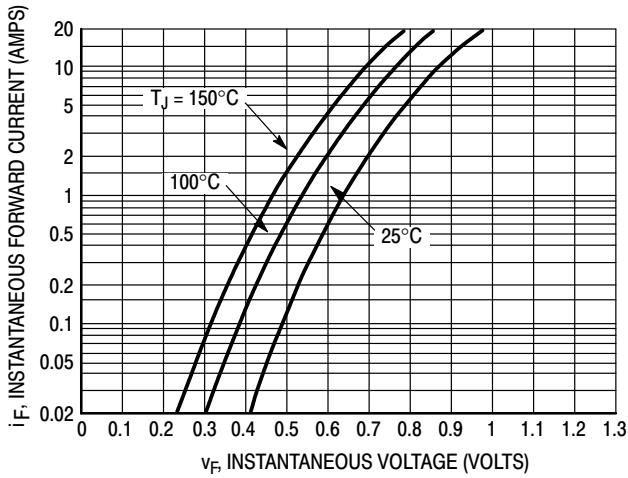


Figure 1. Typical Forward Voltage

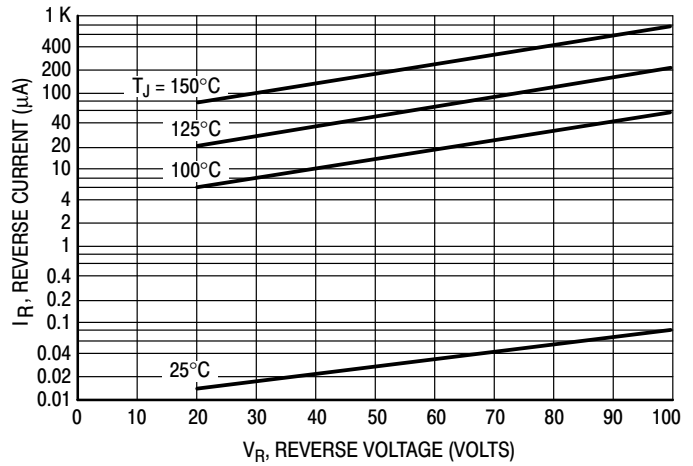


Figure 2. Typical Reverse Current\*

\*The curves shown are typical for the highest voltage device in the voltage grouping. Typical reverse current for lower voltage selections can be estimated from these curves if  $V_R$  is sufficient below rated  $V_R$ .

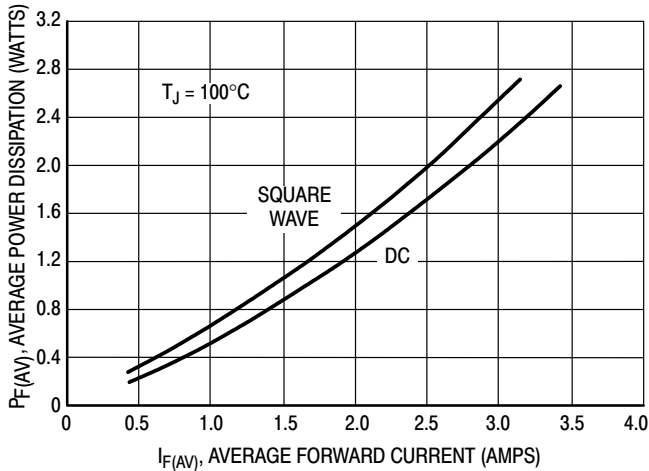


Figure 3. Power Dissipation

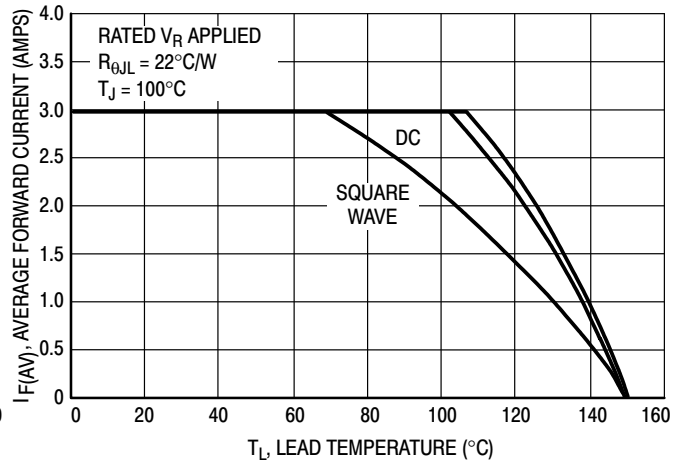


Figure 4. Current Derating, Lead

# MBRS1100T3, MBRS190T3

## TYPICAL ELECTRICAL CHARACTERISTICS

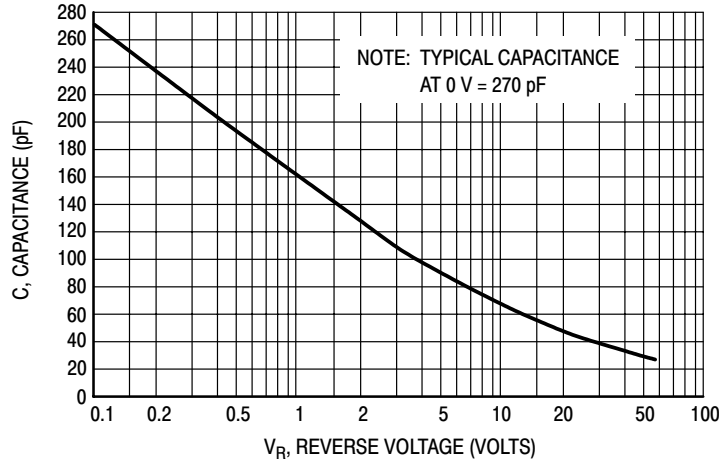



Figure 5. Typical Capacitance

## INFORMATION FOR USING THE SMB SURFACE MOUNT PACKAGE

### MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection

interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

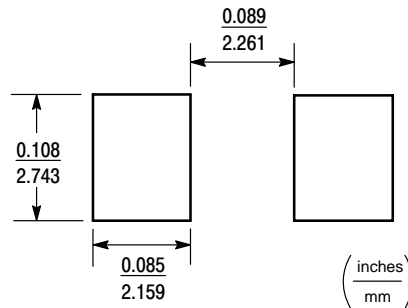

### MOUNTING PRECAUTIONS

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.

- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.\*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference shall be a maximum of 10°C.


- The soldering temperature and time shall not exceed 260°C for more than 5 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used as the use of forced cooling will increase the temperature gradient and result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling

\* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

# MBRS1100T3, MBRS190T3

## PACKAGE DIMENSIONS


### SMB PLASTIC PACKAGE CASE 403A-03 ISSUE D

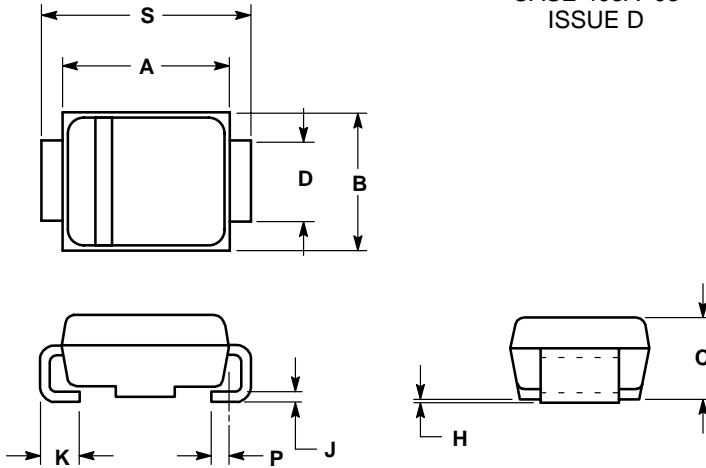

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. D DIMENSION SHALL BE MEASURED WITHIN DIMENSION P.

| DIM | INCHES    |        | MILLIMETERS |       |
|-----|-----------|--------|-------------|-------|
|     | MIN       | MAX    | MIN         | MAX   |
| A   | 0.160     | 0.180  | 4.06        | 4.57  |
| B   | 0.130     | 0.150  | 3.30        | 3.81  |
| C   | 0.075     | 0.095  | 1.90        | 2.41  |
| D   | 0.077     | 0.083  | 1.96        | 2.11  |
| H   | 0.0020    | 0.0060 | 0.051       | 0.152 |
| J   | 0.006     | 0.012  | 0.15        | 0.30  |
| K   | 0.030     | 0.050  | 0.76        | 1.27  |
| P   | 0.020 REF |        | 0.51 REF    |       |
| S   | 0.205     | 0.220  | 5.21        | 5.59  |

**ON Semiconductor** and  are trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

### NORTH AMERICA Literature Fulfillment:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com  
Fax Response Line: 303-675-2167 or 800-344-3810 Toll Free USA/Canada

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**EUROPE:** LDC for ON Semiconductor – European Support

**German Phone:** (+1) 303-308-7140 (Mon-Fri 2:30pm to 7:00pm CET)  
**Email:** ONlit-german@hibbertco.com  
**French Phone:** (+1) 303-308-7141 (Mon-Fri 2:00pm to 7:00pm CET)  
**Email:** ONlit-french@hibbertco.com  
**English Phone:** (+1) 303-308-7142 (Mon-Fri 12:00pm to 5:00pm GMT)  
**Email:** ONlit@hibbertco.com

**EUROPEAN TOLL-FREE ACCESS\*: 00-800-4422-3781**

\*Available from Germany, France, Italy, UK, Ireland

### CENTRAL/SOUTH AMERICA:

**Spanish Phone:** 303-308-7143 (Mon-Fri 8:00am to 5:00pm MST)  
**Email:** ONlit-spanish@hibbertco.com  
**Toll-Free from Mexico:** Dial 01-800-288-2872 for Access –  
then Dial 866-297-9322

**ASIA/PACIFIC:** LDC for ON Semiconductor – Asia Support

**Phone:** 303-675-2121 (Tue-Fri 9:00am to 1:00pm, Hong Kong Time)  
**Toll Free from Hong Kong & Singapore:**  
**001-800-4422-3781**

**Email:** ONlit-asia@hibbertco.com

**JAPAN:** ON Semiconductor, Japan Customer Focus Center

4-32-1 Nishi-Gotanda, Shinagawa-ku, Tokyo, Japan 141-0031  
**Phone:** 81-3-5740-2700  
**Email:** r14525@onsemi.com

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.